


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.46V I:0.1572A P:32.897W PF:0.9495 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2970.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 65	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 90.29 lm/W			
MODEL: 800mA 38D 3000K Ra90		Imax (cd)	5729	S/MH (C0/180)	0.62
NOMINAL POWER (W)	33.5	LOR (%)	100.0	S/MH (C90/270)	0.61
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2970.3	η UP, DN (C0-180)	0.3, 53.0
NOMINAL FLUX (lm)	2970.35	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.5, 46.2
LAMPS INSIDE	1	η up (%)	0.8	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	99.2	CIBSE SHR MAX	0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

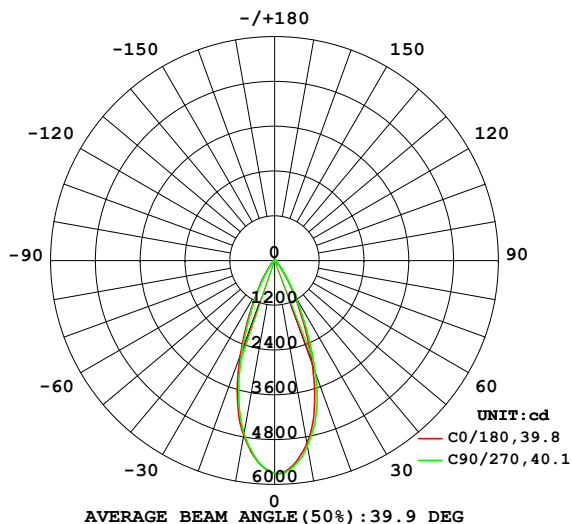

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

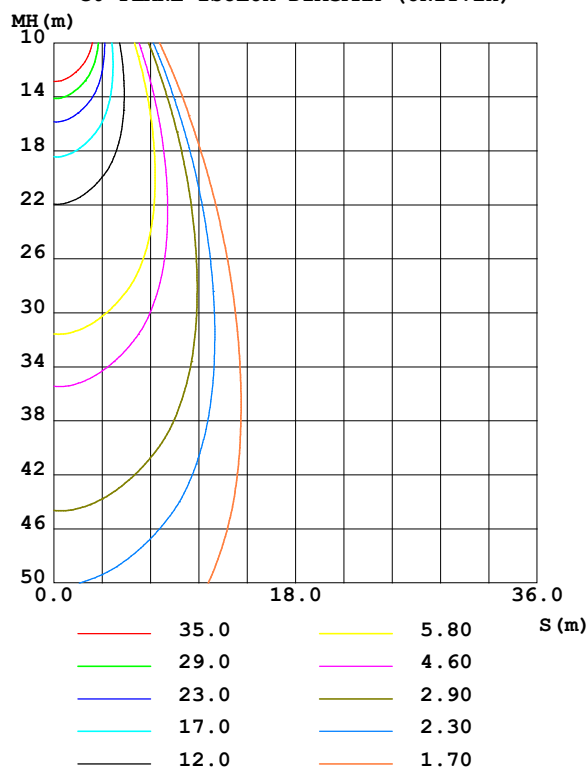

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2022-09-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4979	5062	5052	4921	4764	4677	4714	4868	0- 10	502.6	502.6	16.9,16.9
20	2962	3159	3208	2934	2692	2502	2534	2768	10- 20	1090	1592	53.6,53.6
30	1032	1152	1141	1011	885.3	814.0	817.7	934.9	20- 30	808.9	2401	80.8,80.8
40	271.6	312.0	308.7	272.3	233.1	213.9	210.2	241.2	30- 40	333.2	2735	92.1,92.1
50	81.33	90.05	95.37	86.94	73.71	69.06	67.10	73.76	40- 50	112.2	2847	95.8,95.8
60	42.81	43.86	44.74	42.60	39.83	38.60	38.40	39.89	50- 60	50.15	2897	97.5,97.5
70	28.09	29.63	30.02	27.81	25.72	23.35	23.42	25.56	60- 70	33.79	2931	98.7,98.7
80	6.424	7.740	7.896	6.477	4.904	3.015	2.904	4.715	70- 80	15.53	2946	99.2,99.2
90	0.1461	0.1654	0.1462	0.1432	0.1616	0.1608	0.1665	0.1560	80- 90	1.442	2948	99.2,99.2
100	0.2400	0.2240	0.2256	0.2405	0.2673	0.2741	0.2875	0.2661	90-100	0.2090	2948	99.2,99.2
110	0.4307	0.4050	0.4124	0.4284	0.5348	0.5802	0.5980	0.5507	100-110	0.3754	2948	99.3,99.3
120	0.8007	0.7489	0.7542	0.8040	1.416	1.548	1.582	1.437	110-120	0.7504	2949	99.3,99.3
130	1.873	1.741	1.758	1.923	3.735	4.021	4.088	3.773	120-130	1.675	2951	99.3,99.3
140	4.461	4.191	4.239	4.576	7.744	8.138	8.214	7.760	130-140	3.364	2954	99.5,99.5
150	8.383	8.038	8.124	8.555	12.26	12.61	12.69	12.22	140-150	5.128	2959	99.6,99.6
160	12.04	11.82	11.93	12.25	15.27	15.46	15.49	15.17	150-160	5.588	2965	99.8,99.8
170	14.12	13.98	14.11	14.22	15.81	15.86	15.83	15.69	160-170	4.077	2969	100,100
180	15.61	15.72	15.59	15.80	15.69	15.78	15.63	15.82	170-180	1.454	2970	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2804.7 lm

%lum = 94.4%

%lamp = 94.4%

Conical surface Flux(130deg): 2915.2 lm

%lum = 98.1%


%lamp = 98.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-09-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.46V I:0.1572A P:32.897W PF:0.9495 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2970.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 65	Shielding Angle:

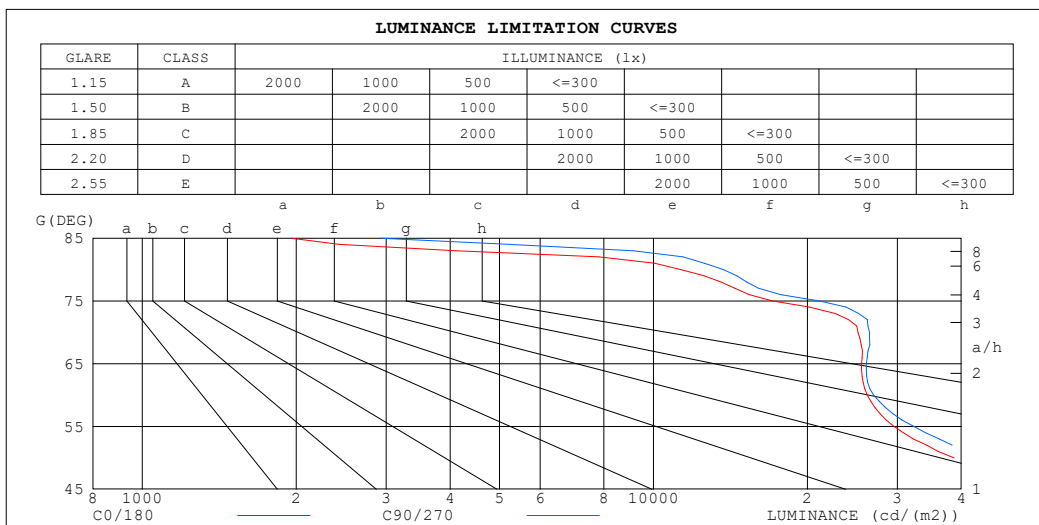

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1959	2933
80	11323	13703
75	17117	21129
70	25139	26449
65	25538	26093
60	26209	26968
55	29556	32359
50	38729	44710
45	61194	69996


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2022-09-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.46V I:0.1572A P:32.897W PF:0.9495 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2970.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 65	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

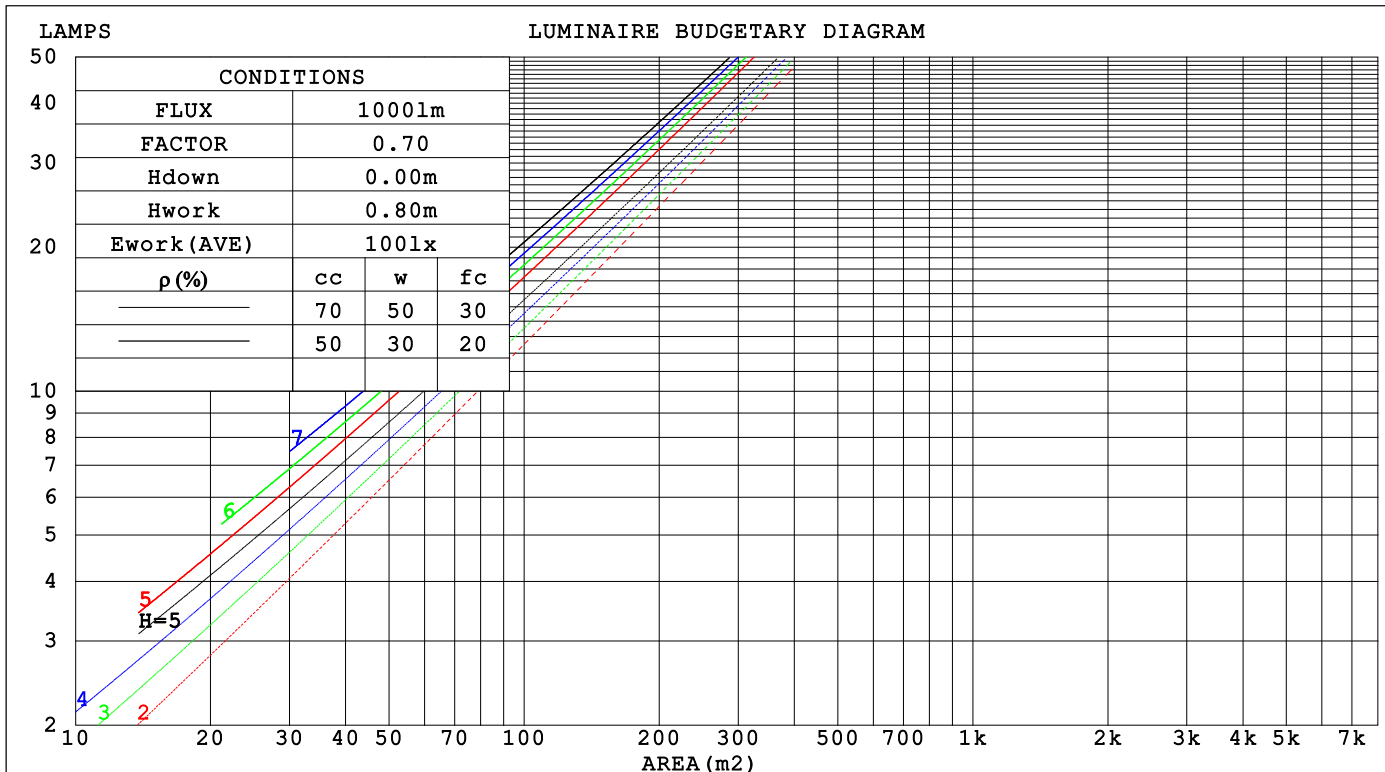

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-09-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.46V I:0.1572A P:32.897W PF:0.9495 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2970.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 65	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.169	.096	.031	.163	.093	.029	.150	.086	.027	.138	.079	.025	.127	.073	.024		
2.0	.161	.088	.027	.155	.085	.026	.144	.080	.025	.134	.075	.023	.124	.070	.022		
3.0	.152	.081	.024	.147	.079	.024	.137	.074	.023	.129	.071	.022	.121	.067	.021		
4.0	.143	.074	.022	.139	.073	.022	.131	.069	.021	.124	.066	.020	.117	.063	.019		
5.0	.136	.069	.020	.132	.068	.020	.125	.065	.019	.119	.063	.019	.113	.060	.018		
6.0	.129	.065	.019	.126	.064	.018	.120	.061	.018	.114	.059	.017	.109	.057	.017		
7.0	.123	.061	.017	.120	.060	.017	.115	.058	.017	.110	.056	.016	.105	.054	.016		
8.0	.117	.057	.016	.115	.056	.016	.110	.055	.016	.105	.053	.015	.101	.052	.015		
9.0	.112	.054	.015	.110	.054	.015	.106	.052	.015	.102	.051	.015	.098	.050	.014		
10.0	.107	.052	.014	.105	.051	.014	.102	.050	.014	.098	.049	.014	.094	.047	.014		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.196	.196	.196	.168	.168	.168	.114	.114	.114	.066	.066	.066	.021	.021	.021		
1.0	.176	.163	.151	.151	.140	.130	.103	.096	.090	.059	.056	.052	.019	.018	.017		
2.0	.161	.138	.120	.138	.119	.104	.094	.082	.072	.054	.048	.042	.017	.016	.014		
3.0	.148	.119	.097	.127	.103	.084	.087	.072	.059	.050	.042	.035	.016	.014	.011		
4.0	.137	.105	.080	.117	.090	.070	.081	.063	.049	.047	.037	.029	.015	.012	.010		
5.0	.127	.093	.067	.109	.080	.058	.075	.056	.041	.044	.033	.024	.014	.011	.008		
6.0	.120	.083	.057	.103	.072	.050	.071	.051	.035	.041	.030	.021	.013	.010	.007		
7.0	.113	.076	.050	.097	.066	.043	.067	.046	.031	.039	.027	.018	.013	.009	.006		
8.0	.107	.069	.043	.092	.060	.038	.064	.042	.027	.037	.025	.016	.012	.008	.005		
9.0	.101	.064	.039	.087	.055	.034	.061	.039	.024	.035	.023	.014	.011	.008	.005		
10.0	.097	.059	.035	.083	.052	.030	.058	.036	.021	.034	.021	.013	.011	.007	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-09-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.46V I:0.1572A P:32.897W PF:0.9495 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2970.35x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: VJC Lighting					SUR.: 65			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.8	18.7	18.1	18.9	19.1	18.2	19.1	18.5	19.3	19.4
3H	18.2	19.0	18.4	19.2	19.4	18.5	19.3	18.8	19.5	19.8
4H	18.3	19.0	18.6	19.3	19.5	18.7	19.4	19.0	19.7	19.9
6H	18.3	19.0	18.6	19.2	19.5	18.7	19.4	19.0	19.6	19.9
8H	18.3	18.9	18.6	19.2	19.5	18.7	19.4	19.0	19.6	19.9
12H	18.2	18.9	18.5	19.1	19.4	18.6	19.3	19.0	19.6	19.8
4H 2H	17.8	18.6	18.1	18.8	19.0	18.2	19.0	18.5	19.2	19.4
3H	18.3	19.0	18.7	19.3	19.6	18.7	19.3	19.0	19.6	19.9
4H	18.5	19.1	18.9	19.4	19.7	18.9	19.5	19.2	19.8	20.1
6H	18.6	19.1	18.9	19.4	19.8	18.9	19.5	19.3	19.8	20.2
8H	18.5	19.0	18.9	19.4	19.8	18.9	19.4	19.3	19.8	20.2
12H	18.5	18.9	18.9	19.3	19.7	18.9	19.3	19.3	19.7	20.1
8H 4H	18.5	19.0	18.9	19.4	19.8	18.9	19.4	19.3	19.7	20.1
6H	18.6	19.0	19.0	19.4	19.8	19.0	19.4	19.4	19.8	20.2
8H	18.6	18.9	19.0	19.4	19.8	19.0	19.3	19.4	19.7	20.2
12H	18.5	18.8	19.0	19.3	19.8	18.9	19.2	19.4	19.7	20.2
12H 4H	18.5	18.9	18.9	19.3	19.7	18.8	19.3	19.3	19.7	20.1
6H	18.6	18.9	19.0	19.3	19.8	18.9	19.3	19.4	19.7	20.2
8H	18.5	18.8	19.0	19.3	19.8	18.9	19.2	19.4	19.7	20.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.5 / - 2.2					+ 1.7 / - 2.2				
1.5H	+ 2.9 / - 1.9					+ 3.2 / - 2.0				
2.0H	+ 2.2 / - 1.2					+ 2.4 / - 1.4				

CIE Pub.117, 2970 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.8)
Area: 0.00331 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-09-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.46V I:0.1572A P:32.897W PF:0.9495 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2970.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 65	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	76	86	80	76	85	80	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	109	106	104	106	104	102	95
4.00	113	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	108	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2022-09-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 7.580m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.46V I:0.1572A P:32.897W PF:0.9495 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2970.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 65	Shielding Angle:

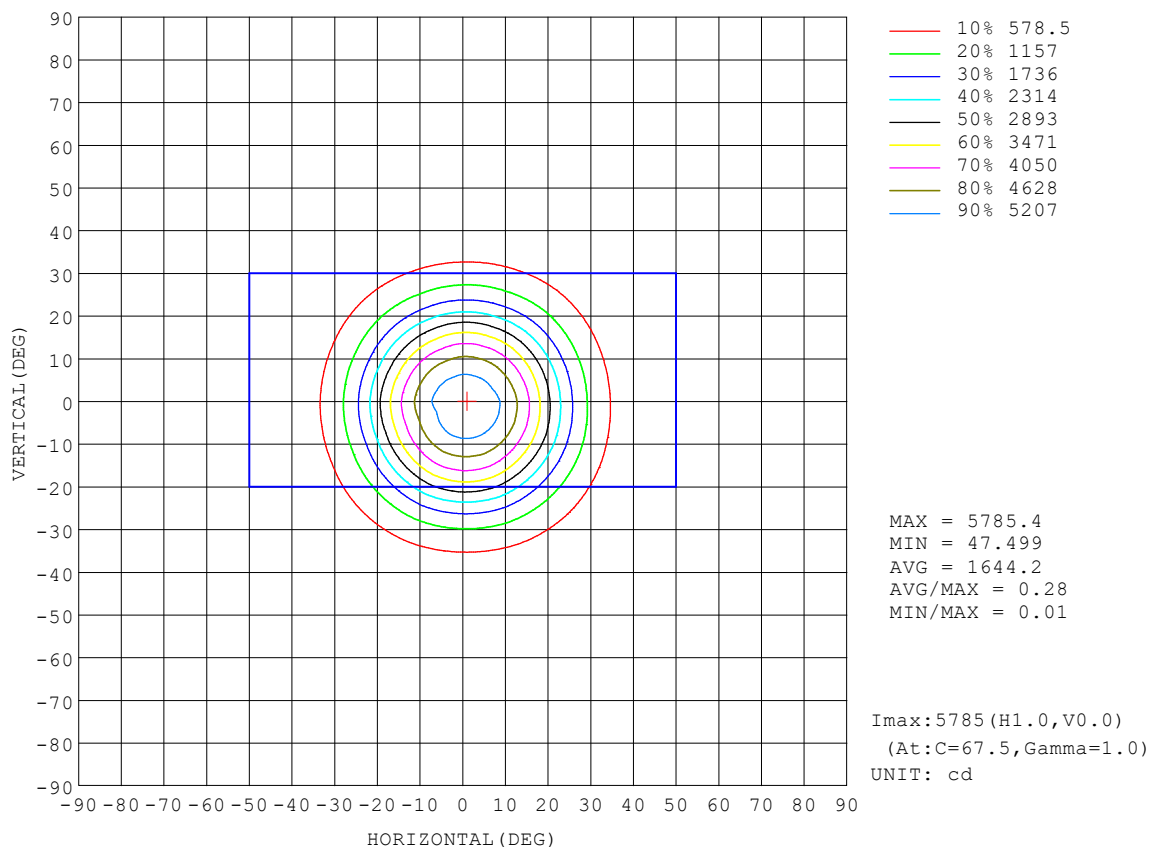


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-09-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.46V I:0.1572A P:32.897W PF:0.9495 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2970.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 65	Shielding Angle:

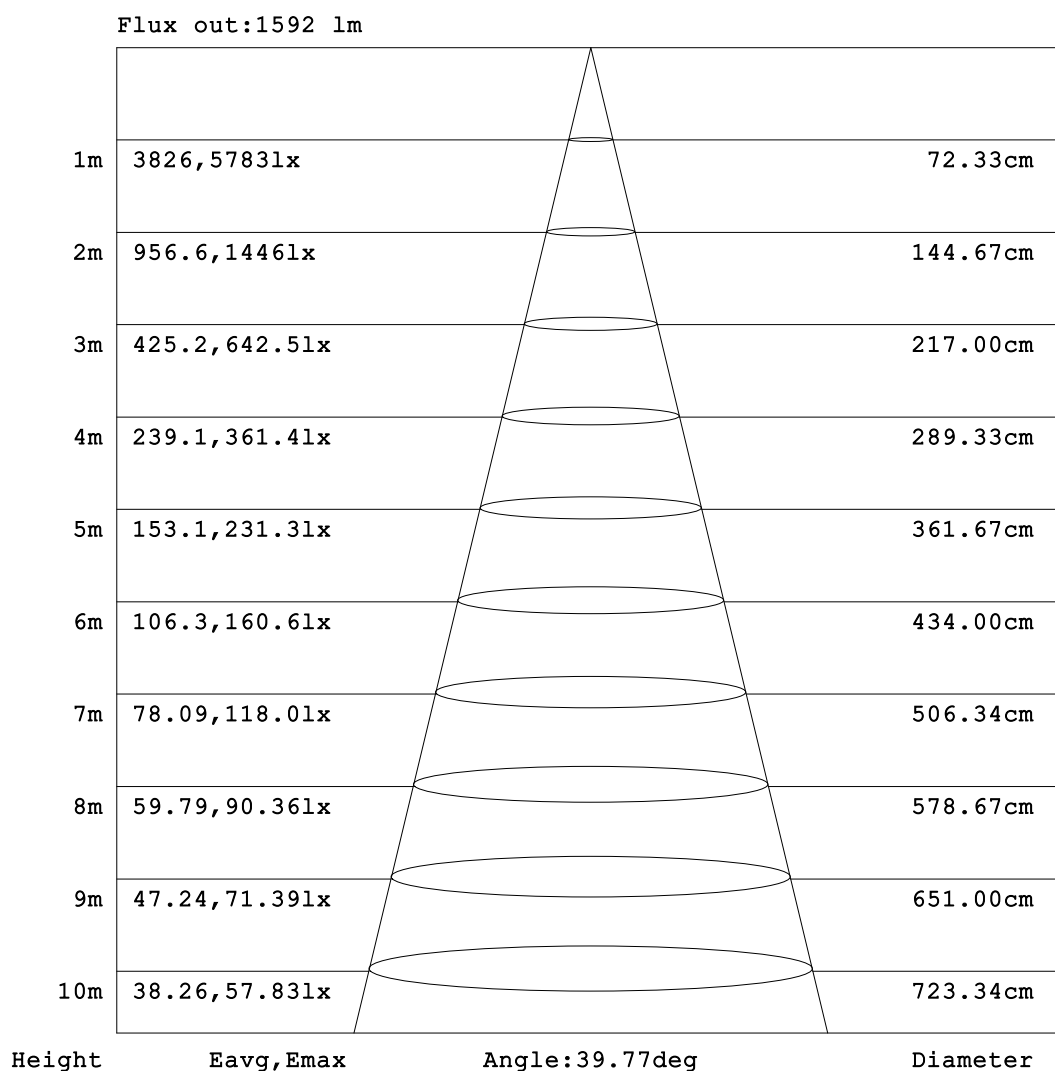


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-09-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.46V I:0.1572A P:32.897W PF:0.9495 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2970.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 65	Shielding Angle:

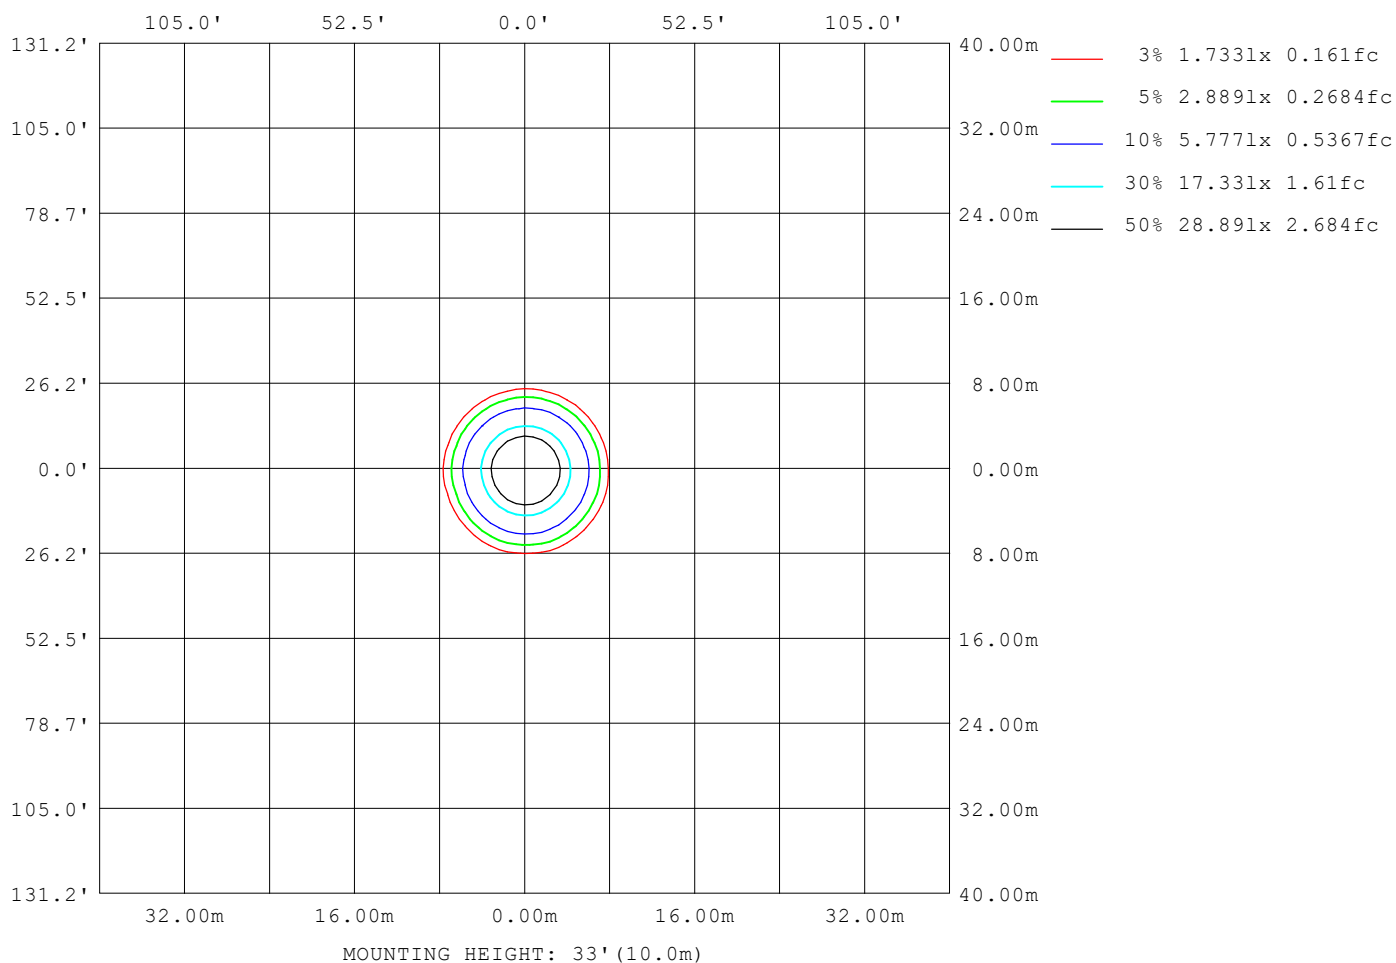

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-09-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.46V I:0.1572A P:32.897W PF:0.9495 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2970.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 65	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	24431
L_0~180 (75) av	15360
L_0~180 (85) av	1427
L_90~270 (65) av	24538
L_90~270 (75) av	16568
L_90~270 (85) av	1712
L_45 (65) av	24344
L_45 (75) av	15694
L_45 (85) av	1547

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-09-29

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

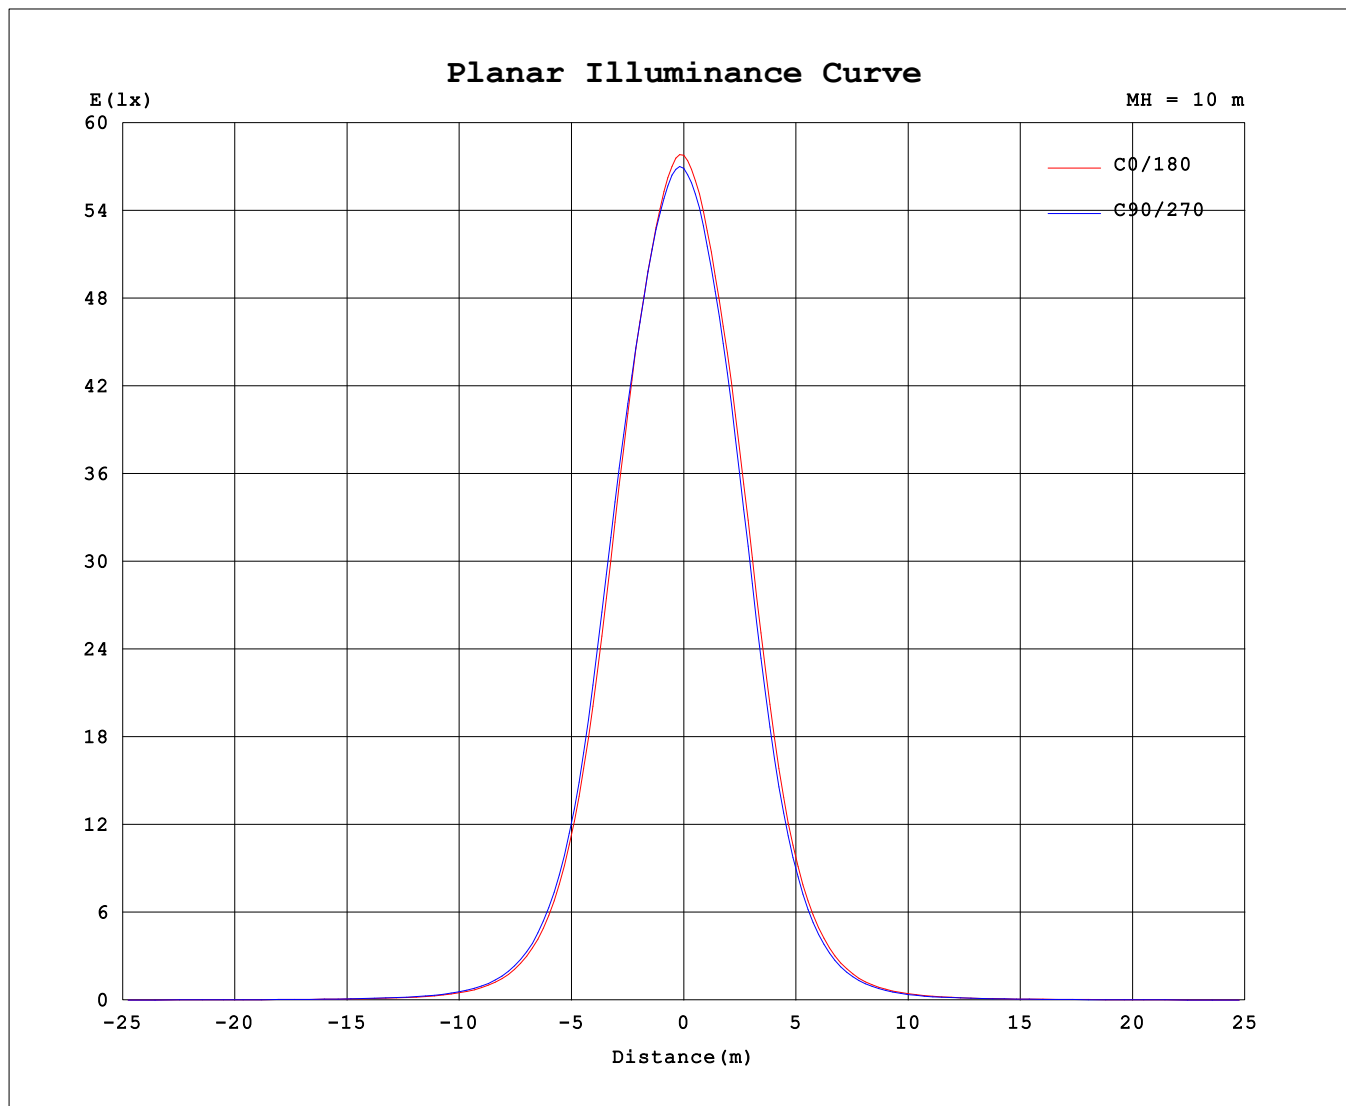

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-09-29

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.46V I:0.1572A P:32.897W PF:0.9495 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:2970.35x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 65	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	5702	5702	5702	5702	5702	5702	5702	5702	5702	5702	5702	5702	5702	5702	5702	5702			
5	5521	5556	5569	5583	5559	5536	5479	5425	5389	5347	5333	5332	5370	5403	5461	5511			
10	4979	5037	5062	5077	5052	5014	4921	4827	4764	4700	4677	4655	4714	4773	4868	4964			
15	4128	4232	4277	4327	4302	4248	4094	3955	3866	3749	3690	3662	3732	3810	3948	4068			
20	2962	3103	3159	3247	3208	3123	2934	2777	2692	2552	2502	2478	2534	2611	2768	2898			
25	1851	1962	2005	2061	2008	1959	1806	1677	1607	1514	1493	1453	1514	1573	1705	1799			
30	1032	1119	1152	1175	1141	1108	1011	931	885	832	814	787	818	851	935	997			
35	540	587	614	625	607	587	533	483	458	431	421	407	418	441	482	514			
40	272	300	312	319	309	301	272	245	233	220	214	206	210	221	241	258			
45	141	156	162	167	164	163	147	133	124	118	114	110	111	115	125	132			
50	81.3	88.0	90.0	94.0	95.4	95.0	86.9	79.5	73.7	71.4	69.1	66.5	67.1	70.0	73.8	77.4			
55	55.4	58.0	58.1	60.1	61.6	61.6	57.6	53.8	51.4	50.2	48.8	47.4	48.1	49.2	51.0	53.3			
60	42.8	44.1	43.9	44.6	44.7	44.9	42.6	40.6	39.8	39.6	38.6	37.8	38.4	38.9	39.9	41.2			
65	35.3	36.2	36.1	36.5	36.6	36.2	34.9	33.7	33.1	32.8	32.0	31.5	32.1	32.6	33.1	34.2			
70	28.1	29.3	29.6	30.2	30.0	29.4	27.8	26.3	25.7	24.6	23.4	22.8	23.4	24.2	25.6	27.0			
75	14.5	16.8	18.0	19.2	18.1	16.2	13.7	12.5	11.8	10.9	10.4	9.99	10.2	10.6	11.6	12.9			
80	6.42	7.28	7.74	8.13	7.90	7.45	6.48	5.62	4.90	3.79	3.01	2.62	2.90	3.53	4.72	5.67			
85	0.56	0.72	0.80	0.94	0.85	0.75	0.58	0.39	0.27	0.19	0.13	0.15	0.14	0.18	0.27	0.41			
90	0.15	0.14	0.17	0.14	0.15	0.14	0.14	0.15	0.16	0.14	0.16	0.14	0.17	0.15	0.16	0.15			
95	0.17	0.19	0.16	0.18	0.16	0.19	0.17	0.21	0.20	0.18	0.21	0.19	0.21	0.19	0.20	0.17			
100	0.24	0.26	0.22	0.24	0.23	0.25	0.24	0.28	0.27	0.25	0.27	0.26	0.29	0.26	0.27	0.23			
105	0.33	0.33	0.31	0.33	0.31	0.33	0.33	0.36	0.36	0.35	0.39	0.38	0.40	0.37	0.37	0.32			
110	0.43	0.44	0.40	0.43	0.41	0.44	0.43	0.47	0.53	0.54	0.58	0.58	0.60	0.56	0.55	0.49			
115	0.58	0.58	0.55	0.56	0.55	0.58	0.58	0.63	0.85	0.88	0.93	0.94	0.95	0.91	0.86	0.79			
120	0.80	0.78	0.75	0.76	0.75	0.79	0.80	0.86	1.42	1.49	1.55	1.59	1.58	1.53	1.44	1.32			
125	1.20	1.16	1.11	1.12	1.12	1.17	1.22	1.30	2.35	2.48	2.56	2.63	2.60	2.53	2.38	2.23			
130	1.87	1.79	1.74	1.73	1.76	1.82	1.92	2.04	3.74	3.92	4.02	4.13	4.09	4.00	3.77	3.57			
135	2.95	2.81	2.75	2.72	2.78	2.86	3.03	3.19	5.56	5.79	5.91	6.05	5.98	5.88	5.60	5.36			
140	4.46	4.27	4.19	4.15	4.24	4.34	4.58	4.79	7.74	7.97	8.14	8.25	8.21	8.07	7.76	7.49			
145	6.33	6.10	6.01	5.95	6.08	6.19	6.48	6.72	10.1	10.3	10.4	10.6	10.5	10.3	10.05	9.76			
150	8.38	8.15	8.04	7.99	8.12	8.25	8.56	8.83	12.3	12.5	12.6	12.8	12.7	12.5	12.2	12.0			
155	10.4	10.1	10.1	10.0	10.2	10.3	10.6	10.8	14.1	14.2	14.4	14.5	14.5	14.3	14.0	13.8			
160	12.0	11.8	11.8	11.8	11.9	12.0	12.2	12.4	15.3	15.4	15.5	15.5	15.5	15.3	15.2	15.0			
165	13.3	13.1	13.1	13.2	13.3	13.4	13.4	13.6	15.8	15.8	15.9	15.8	15.8	15.8	15.6	15.5			
170	14.1	14.1	14.0	14.1	14.1	14.2	14.2	14.5	15.8	15.9	15.9	15.8	15.8	15.8	15.7	15.6			
175	14.9	14.9	14.9	14.9	14.8	14.9	15.1	15.2	15.7	15.9	15.9	15.8	15.8	15.8	15.8	15.7			
180	15.6	15.7	15.7	15.6	15.6	15.6	15.8	15.7	15.7	15.7	15.8	15.6	15.6	15.6	15.8	15.7			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:

Test Date:2022-09-29

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:7.580m [K=1.0000]

Remarks: