


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.71V I:0.0209A P:3.9063W PF:0.8458 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:135.106x1 lm		
NAME: WL3182 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 34.59 lm/W			
MODEL	WL3182 2700K RA90 30D	I _{max} (cd)	666.7	S/MH(C0/180)	0.44
NOMINAL POWER(W)	3	LOR(%)	100.0	S/MH(C90/270)	0.49
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	135.11	η UP,DN(C0-180)	0.5,39.1
NOMINAL FLUX(lm)	135.106	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.4,60.1
LAMPS INSIDE	1	η up(%)	0.8	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	η down(%)	99.2	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

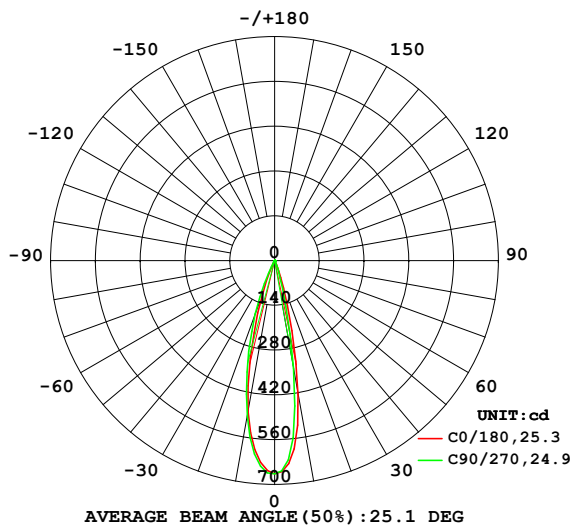

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

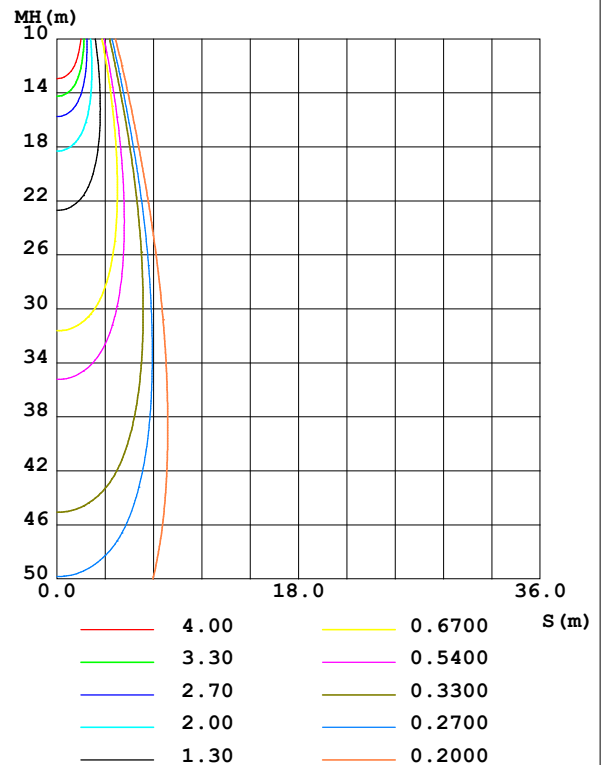

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-11-02

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	425.7	357.7	342.0	393.9	479.2	498.3	495.2	486.9	0- 10	52.76	52.76	39.1,39.1
20	56.45	42.77	39.96	51.37	110.3	165.1	178.4	122.0	10- 20	63.23	116.0	85.9,85.9
30	4.094	3.309	3.102	3.298	5.837	10.84	11.29	6.532	20- 30	15.87	131.9	97.6,97.6
40	0.7490	0.7029	0.6531	0.7170	1.196	1.579	1.463	0.9983	30- 40	1.509	133.4	98.7,98.7
50	0.3812	0.3626	0.3338	0.3235	0.3639	0.4114	0.3717	0.3646	40- 50	0.4626	133.8	99.1,99.1
60	0.0029	0.0002	0	0.0448	0	0.0192	0.0193	0	50- 60	0.1344	134.0	99.2,99.2
70	0	0	0	0	0	0	0	0	60- 70	0.0022	134.0	99.2,99.2
80	0	0	0	0	0	0	0	0	70- 80	0	134.0	99.2,99.2
90	0	0	0	0	0	0	0	0	80- 90	0	134.0	99.2,99.2
100	0	0	0	0	0	0	0	0	90-100	0	134.0	99.2,99.2
110	0	0	0	0	0	0	0	0	100-110	0	134.0	99.2,99.2
120	0	0	0	0	0	0	0	0	110-120	0.0000	134.0	99.2,99.2
130	0.0770	0.1103	0.1080	0.0555	0.0417	0.0085	0.0002	0.0253	120-130	0.0121	134.0	99.2,99.2
140	0.4053	0.4640	0.4548	0.3755	0.3289	0.2631	0.2420	0.2873	130-140	0.1407	134.1	99.3,99.3
150	0.7670	0.8015	0.7966	0.7377	0.7125	0.6446	0.6196	0.6604	140-150	0.3336	134.5	99.5,99.5
160	0.8639	0.8433	0.8635	0.8551	0.8832	0.8792	0.8746	0.8411	150-160	0.3729	134.8	99.8,99.8
170	0.6076	0.5864	0.6055	0.6771	0.7089	0.7600	0.7493	0.6904	160-170	0.2262	135.0	100,100
180	0.4471	0.4866	0.4859	0.5264	0.4637	0.4866	0.5053	0.5153	170-180	0.0563	135.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 133.68 lm

%lum = 98.9%

%lamp = 98.9%

Conical surface Flux(130deg): 133.96 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:001
 Test Date:2024-11-02

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:8.370m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.71V I:0.0209A P:3.9063W PF:0.8458 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:135.106x1 lm		
NAME: WL3182 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

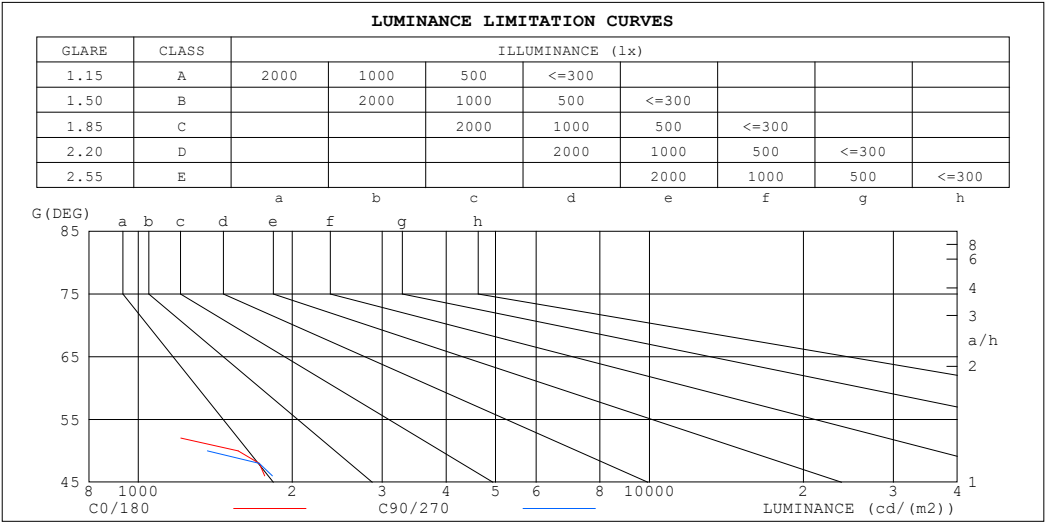

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	0	0
65	0	0
60	15	0
55	653	258
50	1568	1365
45	1952	1921


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-11-02

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.71V I:0.0209A P:3.9063W PF:0.8458 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:135.106x1 lm		
NAME: WL3182 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

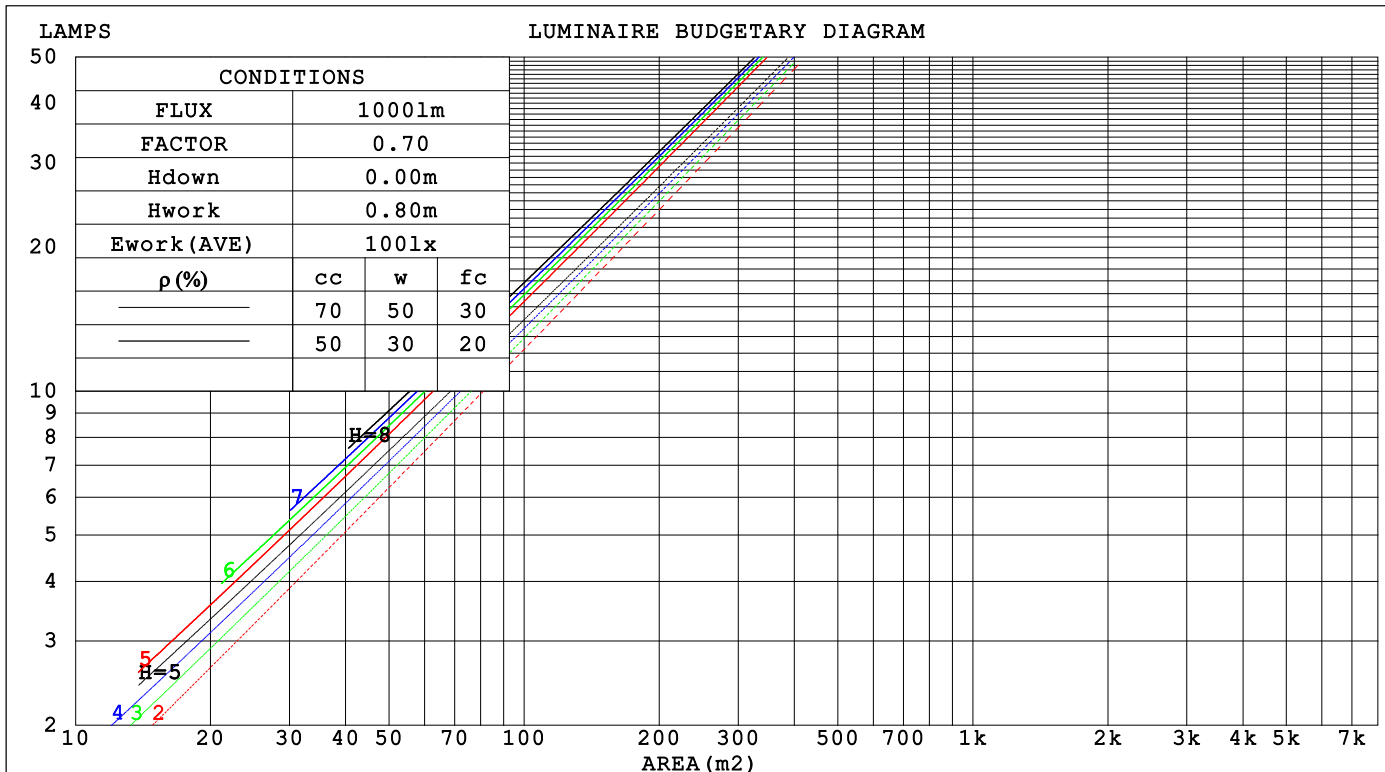

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-11-02

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.71V I:0.0209A P:3.9063W PF:0.8458 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:135.106x1 lm		
NAME: WL3182 2700K RA90 30D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: VJC Lighting			SUR.: 22			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.131	.074	.024	.124	.071	.022	.111	.064	.020	.099	.057	.018	.089	.051	.017		
2.0	.120	.066	.020	.115	.063	.019	.104	.058	.018	.094	.053	.017	.085	.048	.015		
3.0	.112	.059	.018	.107	.057	.017	.098	.053	.016	.090	.049	.015	.082	.046	.014		
4.0	.104	.054	.016	.100	.053	.016	.093	.049	.015	.086	.046	.014	.080	.043	.013		
5.0	.098	.050	.014	.095	.049	.014	.088	.046	.014	.082	.043	.013	.077	.041	.012		
6.0	.093	.046	.013	.090	.045	.013	.084	.043	.013	.079	.041	.012	.074	.039	.012		
7.0	.088	.043	.012	.085	.042	.012	.081	.041	.012	.076	.039	.011	.072	.037	.011		
8.0	.084	.041	.011	.081	.040	.011	.077	.039	.011	.073	.037	.011	.070	.036	.010		
9.0	.080	.039	.011	.078	.038	.011	.074	.037	.010	.071	.035	.010	.067	.034	.010		
10.0	.076	.037	.010	.075	.036	.010	.071	.035	.010	.068	.034	.010	.065	.033	.009		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021		
1.0	.174	.164	.155	.149	.141	.133	.102	.097	.092	.059	.056	.054	.019	.018	.017		
2.0	.156	.139	.125	.134	.120	.108	.092	.083	.076	.053	.048	.044	.017	.016	.014		
3.0	.141	.120	.103	.121	.103	.090	.083	.072	.063	.048	.042	.037	.015	.014	.012		
4.0	.128	.104	.086	.110	.090	.075	.075	.063	.053	.044	.037	.031	.014	.012	.010		
5.0	.117	.092	.073	.100	.080	.064	.069	.056	.045	.040	.033	.027	.013	.011	.009		
6.0	.108	.082	.063	.093	.071	.055	.064	.050	.039	.037	.029	.023	.012	.010	.008		
7.0	.100	.074	.055	.086	.064	.048	.060	.045	.034	.035	.026	.020	.011	.009	.007		
8.0	.094	.067	.048	.081	.058	.042	.056	.041	.030	.032	.024	.018	.010	.008	.006		
9.0	.088	.061	.043	.076	.053	.038	.052	.037	.027	.031	.022	.016	.010	.007	.005		
10.0	.083	.056	.039	.071	.049	.034	.050	.034	.024	.029	.020	.014	.009	.007	.005		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-11-02

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.71V I:0.0209A P:3.9063W PF:0.8458 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:135.106x1 lm										
NAME: WL3182 2700K RA90 30D					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: VJC Lighting					SUR.: 22			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.2	5.8	5.4	5.9	6.1	4.1	4.7	4.3	4.8	5.0
3H	5.0	5.6	5.3	5.8	6.0	3.9	4.5	4.2	4.7	4.9
4H	5.0	5.5	5.2	5.7	5.9	3.8	4.4	4.1	4.6	4.8
6H	4.9	5.4	5.2	5.6	5.9	3.7	4.3	4.0	4.5	4.7
8H	4.8	5.3	5.1	5.6	5.8	3.7	4.2	4.0	4.4	4.7
12H	4.8	5.3	5.1	5.5	5.8	3.7	4.1	4.0	4.4	4.7
4H 2H	5.0	5.5	5.2	5.7	5.9	3.8	4.4	4.1	4.6	4.8
3H	4.8	5.3	5.1	5.5	5.8	3.7	4.1	4.0	4.4	4.7
4H	4.7	5.1	5.0	5.4	5.7	3.6	4.0	3.9	4.3	4.6
6H	4.6	5.0	5.0	5.3	5.7	3.5	3.8	3.8	4.2	4.5
8H	4.5	4.9	4.9	5.2	5.6	3.4	3.8	3.8	4.1	4.5
12H	4.5	4.8	4.9	5.2	5.6	3.3	3.7	3.8	4.1	4.5
8H 4H	4.5	4.9	4.9	5.2	5.6	3.4	3.8	3.8	4.1	4.5
6H	4.4	4.7	4.8	5.1	5.5	3.3	3.6	3.7	4.0	4.4
8H	4.3	4.6	4.8	5.0	5.5	3.2	3.5	3.7	3.9	4.4
12H	4.3	4.5	4.8	5.0	5.4	3.2	3.4	3.6	3.8	4.3
12H 4H	4.5	4.8	4.9	5.2	5.6	3.3	3.7	3.8	4.1	4.5
6H	4.3	4.6	4.8	5.0	5.5	3.2	3.5	3.7	3.9	4.4
8H	4.3	4.5	4.8	5.0	5.4	3.2	3.4	3.6	3.8	4.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.9 / -18.6					+ 2.8 / -61.4				
1.5H	+ 3.1 / -12.2					+ 2.1 / -16.0				
2.0H	+ 5.0 / - 1.\$					+ 5.9 / - 1.\$				

CIE Pub.117, 135.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -7.0)
Area: 0.00038 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-11-02

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.71V I:0.0209A P:3.9063W PF:0.8458 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:135.106x1 lm		
NAME: WL3182 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	82	90	85	82	89	85	81	78
0.80	98	93	89	97	92	89	96	92	89	85
1.00	101	96	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	100	104	101	98	94
2.00	110	106	103	108	105	102	105	103	100	95
2.50	111	108	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	109	107	106	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: 001
 Test Date: 2024-11-02

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 8.370m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.71V I:0.0209A P:3.9063W PF:0.8458 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:135.106x1 lm		
NAME: WL3182 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

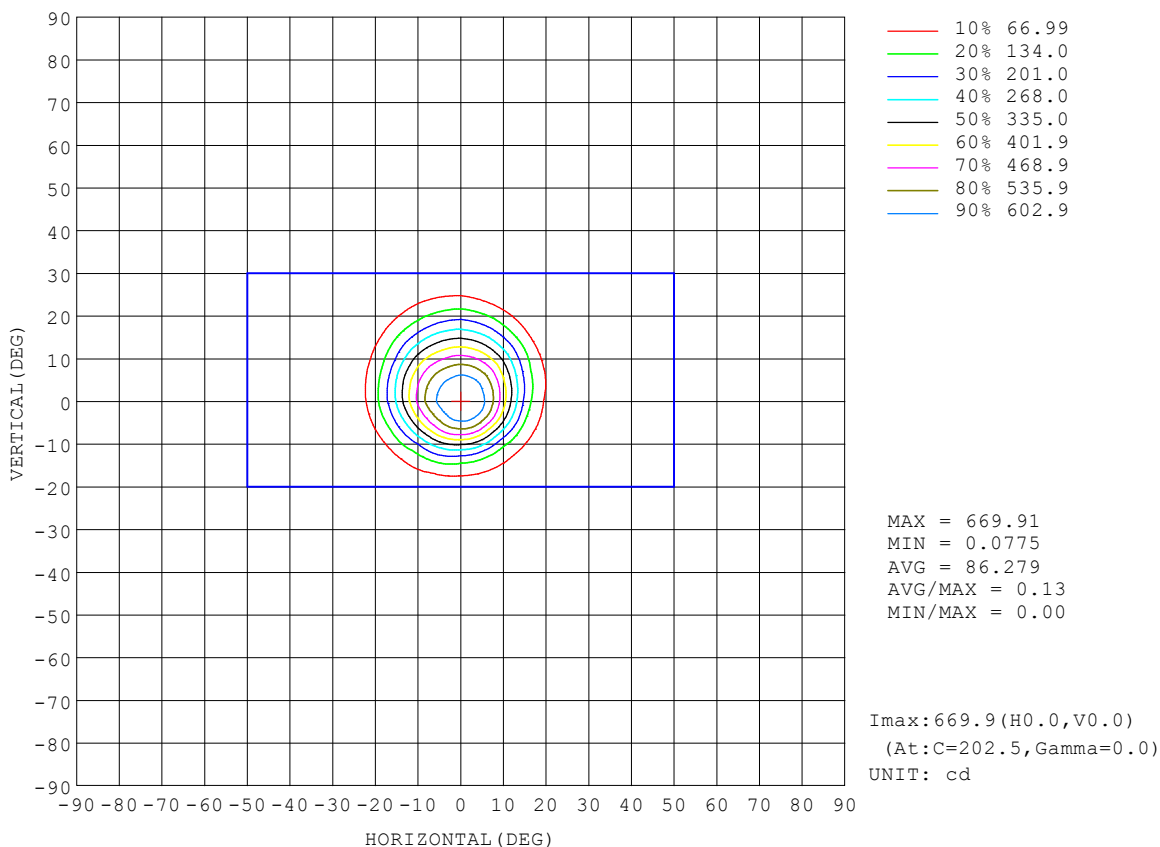


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: 001
Test Date: 2024-11-02

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.71V I:0.0209A P:3.9063W PF:0.8458 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:135.106x1 lm		
NAME: WL3182 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

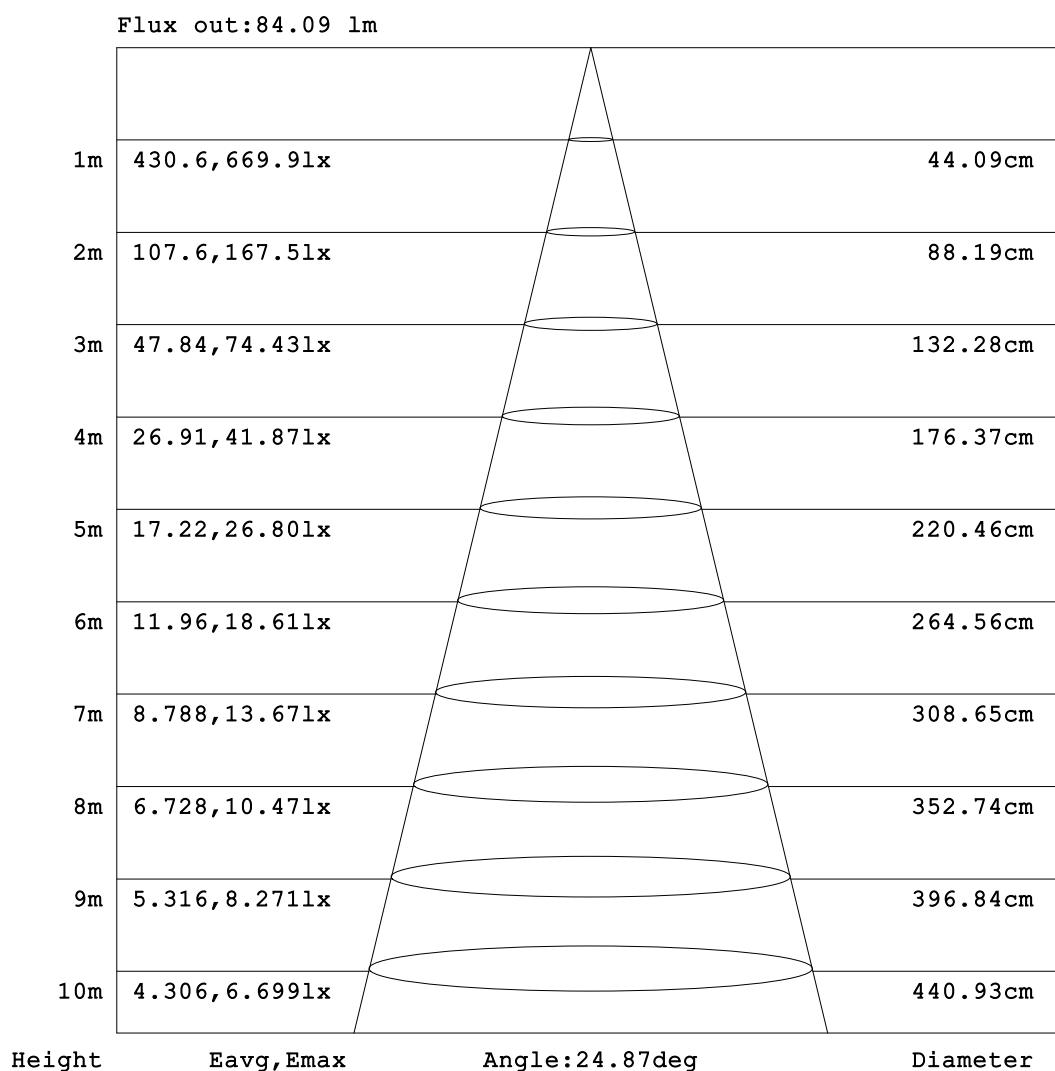


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-11-02

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.71V I:0.0209A P:3.9063W PF:0.8458 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:135.106x1 lm		
NAME: WL3182 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

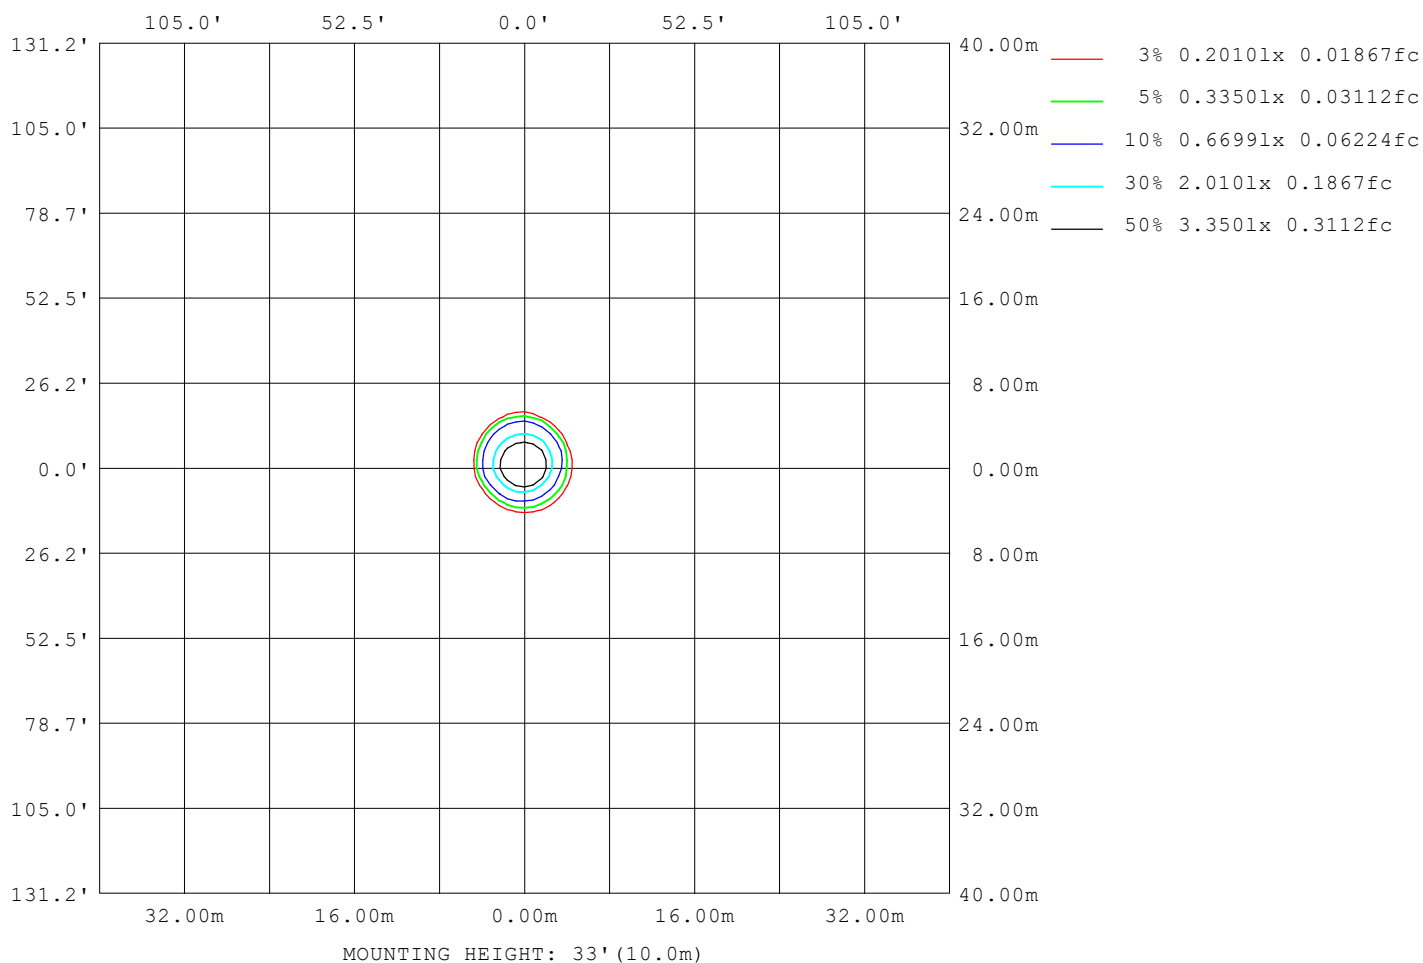

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: 001
Test Date: 2024-11-02

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.71V I:0.0209A P:3.9063W PF:0.8458 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:135.106x1 lm		
NAME: WL3182 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	0
L_0~180 (75) av	0
L_0~180 (85) av	0
L_90~270 (65) av	0
L_90~270 (75) av	0
L_90~270 (85) av	0
L_45 (65) av	0
L_45 (75) av	0
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-11-02

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

Planar Illuminance Curve

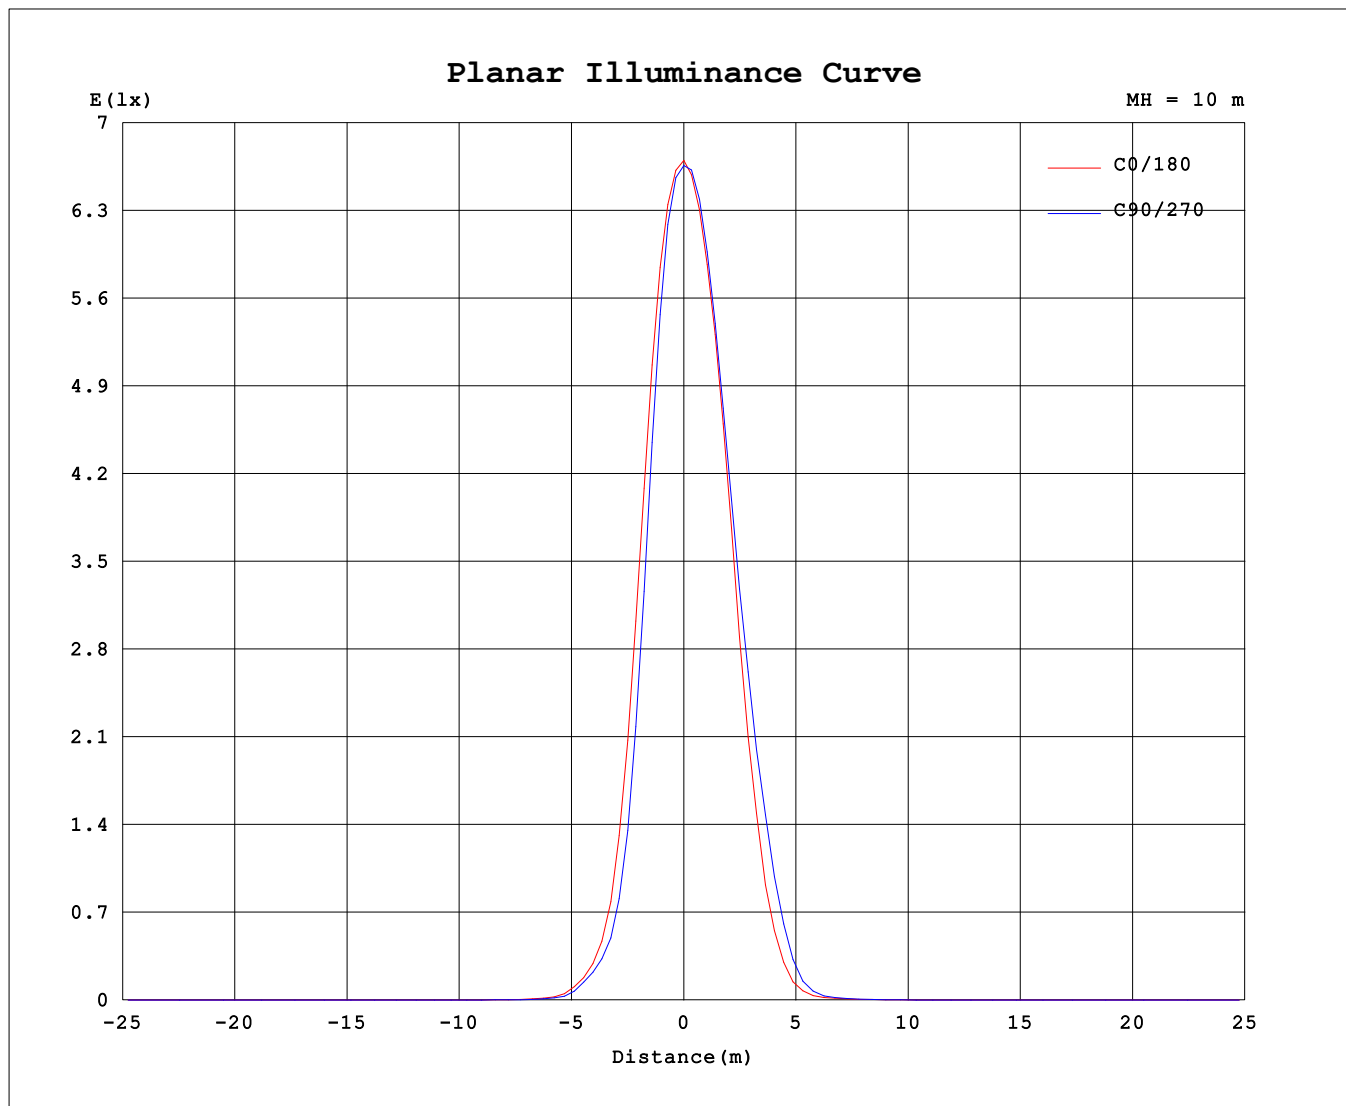

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: 001
Test Date: 2024-11-02

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.71V I:0.0209A P:3.9063W PF:0.8458 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:135.106x1 lm		
NAME: WL3182 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	667	667	667	667	667	667	667	667	667	667	667	667	667	667	667	667			
5	636	639	633	630	624	625	622	627	632	633	636	639	644	644	643	640			
10	426	394	358	348	342	367	394	436	479	493	498	491	495	493	487	459			
15	226	198	150	145	149	186	206	258	315	347	364	359	360	349	328	277			
20	56.4	48.4	42.8	40.9	40.0	42.8	51.4	77.1	110	133	165	171	178	156	122	88.0			
25	23.7	23.0	21.0	20.2	19.0	19.3	19.6	24.0	39.6	53.8	70.5	83.7	79.9	60.1	39.2	27.4			
30	4.09	3.68	3.31	3.19	3.10	3.05	3.30	4.20	5.84	7.64	10.8	12.6	11.3	8.12	6.53	4.88			
35	1.85	1.49	1.29	1.23	1.22	1.26	1.51	2.23	2.73	3.10	3.71	4.02	3.73	3.17	2.81	2.37			
40	0.75	0.70	0.70	0.68	0.65	0.63	0.72	0.90	1.20	1.39	1.58	1.68	1.46	1.22	1.00	0.82			
45	0.52	0.51	0.52	0.51	0.52	0.47	0.50	0.57	0.69	0.77	0.86	0.88	0.77	0.68	0.57	0.55			
50	0.38	0.36	0.36	0.31	0.33	0.35	0.32	0.31	0.36	0.40	0.41	0.42	0.37	0.38	0.36	0.38			
55	0.14	0.09	0.08	0.04	0.06	0.06	0.12	0.13	0.21	0.27	0.26	0.30	0.27	0.29	0.23	0.21			
60	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00	0.00	0.03	0.02	0.05	0.02	0.03	0.00	0.02			
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00			
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.01	0.00	0.03	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.08	0.12	0.11	0.14	0.11	0.12	0.06	0.06	0.04	0.00	0.01	0.00	0.00	0.00	0.03	0.01			
135	0.18	0.24	0.24	0.27	0.23	0.23	0.17	0.15	0.13	0.07	0.08	0.04	0.07	0.05	0.10	0.11			
140	0.41	0.47	0.46	0.49	0.45	0.45	0.38	0.35	0.33	0.26	0.26	0.22	0.24	0.23	0.29	0.30			
145	0.56	0.62	0.62	0.65	0.62	0.60	0.53	0.51	0.49	0.42	0.42	0.37	0.39	0.38	0.44	0.45			
150	0.77	0.82	0.80	0.84	0.80	0.80	0.74	0.72	0.71	0.65	0.64	0.60	0.62	0.60	0.66	0.67			
155	0.85	0.86	0.85	0.86	0.86	0.86	0.82	0.83	0.83	0.77	0.77	0.73	0.76	0.73	0.78	0.77			
160	0.86	0.83	0.84	0.82	0.86	0.84	0.86	0.86	0.88	0.88	0.88	0.86	0.87	0.85	0.84	0.84			
165	0.80	0.75	0.76	0.74	0.77	0.78	0.82	0.81	0.87	0.88	0.87	0.88	0.87	0.86	0.82	0.83			
170	0.61	0.56	0.59	0.56	0.61	0.61	0.68	0.67	0.71	0.77	0.76	0.79	0.75	0.76	0.69	0.69			
175	0.49	0.45	0.49	0.47	0.51	0.51	0.57	0.57	0.57	0.65	0.64	0.66	0.62	0.64	0.59	0.59			
180	0.45	0.48	0.49	0.49	0.49	0.49	0.53	0.52	0.46	0.48	0.49	0.51	0.51	0.52	0.52	0.51			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:001

Test Date:2024-11-02

γ Range: 0 - 180DEG

γ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:8.370m [K=1.0000]

Remarks: