


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.82V I:0.0429A P:3.2364W PF:0.3416 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:109.373x1 lm		
NAME: WL3363 2700K Ra.90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 33.80 lm/W			
MODEL WL3363 2700K Ra.90 36D		Imax(cd)	441.7	S/MH(C0/180)	0.59
NOMINAL POWER(W)	3	LOR(%)	100.0	S/MH(C90/270)	6.33
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	109.37	η UP,DN(C0-180)	0.7,0.1
NOMINAL FLUX(lm)	109.373	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,99.1
LAMPS INSIDE	1	η up(%)	0.8	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220.678	η down(%)	99.2	CIBSE SHR MAX	0.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

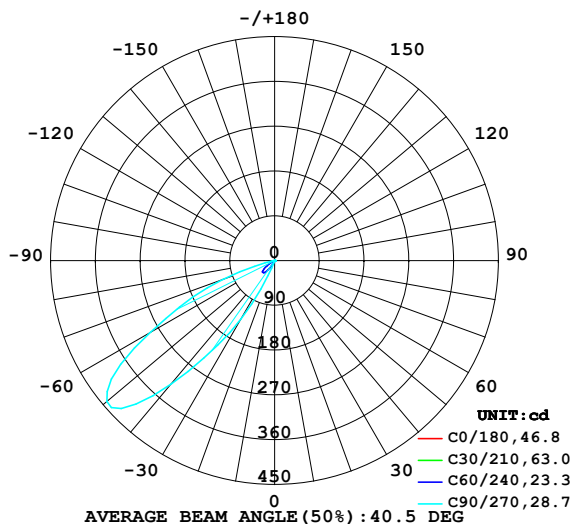

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

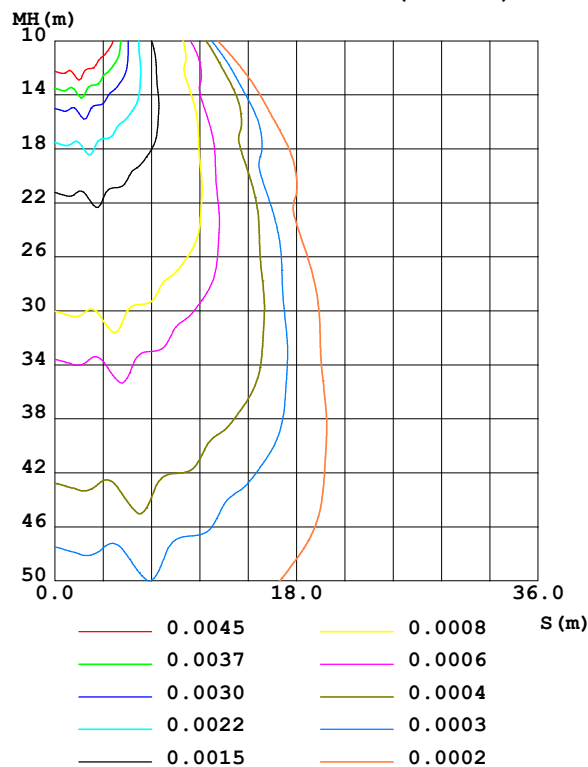

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-08-05

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	0.5310	0.1491	0	0.0654	0.4004	0.7616	1.258	0.9530	0- 10	0.0467	0.0467	0.04,0.04
20	0.4688	0.0267	0	0	0.2022	1.487	7.531	2.542	10- 20	0.2184	0.2651	0.24,0.24
30	0.2997	0.0000	0	0	0.0805	5.054	135.4	23.49	20- 30	3.043	3.308	3.02,3.02
40	0.1673	0.0071	0	0.0106	0.0537	14.70	324.4	67.88	30- 40	15.93	19.24	17.6,17.6
50	0.0724	0	0	0.0046	0.0392	14.60	440.1	73.56	40- 50	33.49	52.72	48.2,48.2
60	0.0103	0	0	0	0.0165	4.816	288.8	40.95	50- 60	33.77	86.50	79.1,79.1
70	0	0	0	0	0	1.116	110.9	7.382	60- 70	17.97	104.5	95.5,95.5
80	0	0	0.0708	0	0	0.3134	5.343	0.9651	70- 80	3.640	108.1	98.8,98.8
90	0	0.0140	0.3310	0.0319	0	0.1151	0.9935	0.3239	80- 90	0.3431	108.5	99.2,99.2
100	0	0.0829	0.6713	0.1550	0	0	0.3824	0.0455	90-100	0.1513	108.6	99.3,99.3
110	0	0.1716	0.8894	0.2936	0.0000	0	0.0515	0	100-110	0.1326	108.7	99.4,99.4
120	0	0.2462	0.9052	0.4047	0.0227	0.0056	0.0064	0	110-120	0.1548	108.9	99.6,99.6
130	0	0.2814	0.7029	0.4687	0.0041	0	0	0	120-130	0.1525	109.0	99.7,99.7
140	0.0247	0.2800	0.4687	0.4520	0.0104	0	0	0	130-140	0.1252	109.2	99.8,99.8
150	0.0392	0.2350	0.4336	0.4337	0.0372	0	0	0	140-150	0.0921	109.3	99.9,99.9
160	0.0392	0.2279	0.5876	0.3546	0.0475	0	0	0	150-160	0.0675	109.3	100,100
170	0.0577	0.2280	0.4042	0.1797	0.0496	0.0226	0	0	160-170	0.0372	109.4	100,100
180	0.0537	0.1210	0.1188	0.0350	0.0496	0.1196	0.0995	0.0259	170-180	0.0089	109.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 37.822 lm

%lum = 34.6%

%lamp = 34.6%

Conical surface Flux(130deg): 99.275 lm

%lum = 90.8%


%lamp = 90.8%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:001
 Test Date:2024-08-05

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:8.370m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.82V I:0.0429A P:3.2364W PF:0.3416 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:109.373x1 lm		
NAME: WL3363 2700K Ra.90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

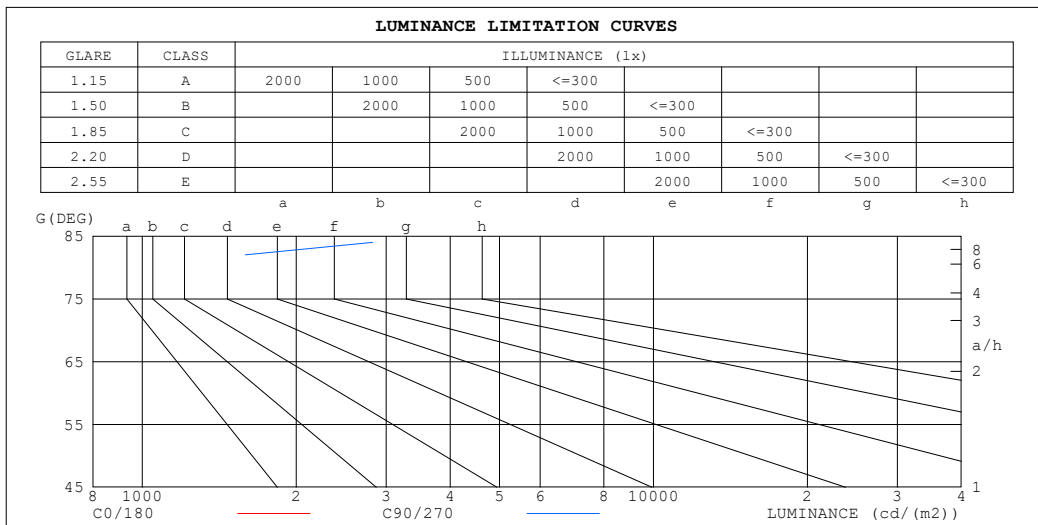


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: 001
Test Date: 2024-08-05

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 8.370m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.82V I:0.0429A P:3.2364W PF:0.3416 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:109.373x1 lm		
NAME: WL3363 2700K Ra.90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.90	.87	.88	.86	.84	.82
2.0	.88	.80	.74	.86	.79	.73	.82	.76	.71	.78	.73	.69	.75	.71	.67	.65
3.0	.74	.65	.58	.72	.64	.57	.69	.62	.56	.66	.60	.55	.63	.58	.54	.51
4.0	.63	.53	.45	.62	.52	.45	.59	.51	.44	.56	.49	.43	.54	.48	.43	.40
5.0	.54	.44	.36	.53	.43	.36	.50	.42	.35	.48	.41	.35	.46	.40	.34	.32
6.0	.47	.36	.29	.46	.36	.29	.44	.35	.28	.42	.34	.28	.40	.33	.28	.25
7.0	.41	.31	.23	.40	.30	.23	.38	.29	.23	.36	.29	.23	.35	.28	.22	.20
8.0	.36	.26	.19	.35	.26	.19	.33	.25	.19	.32	.24	.19	.31	.24	.18	.16
9.0	.32	.22	.16	.31	.22	.16	.30	.21	.16	.28	.21	.15	.27	.20	.15	.13
10.0	.28	.19	.13	.28	.19	.13	.26	.19	.13	.25	.18	.13	.24	.18	.13	.11

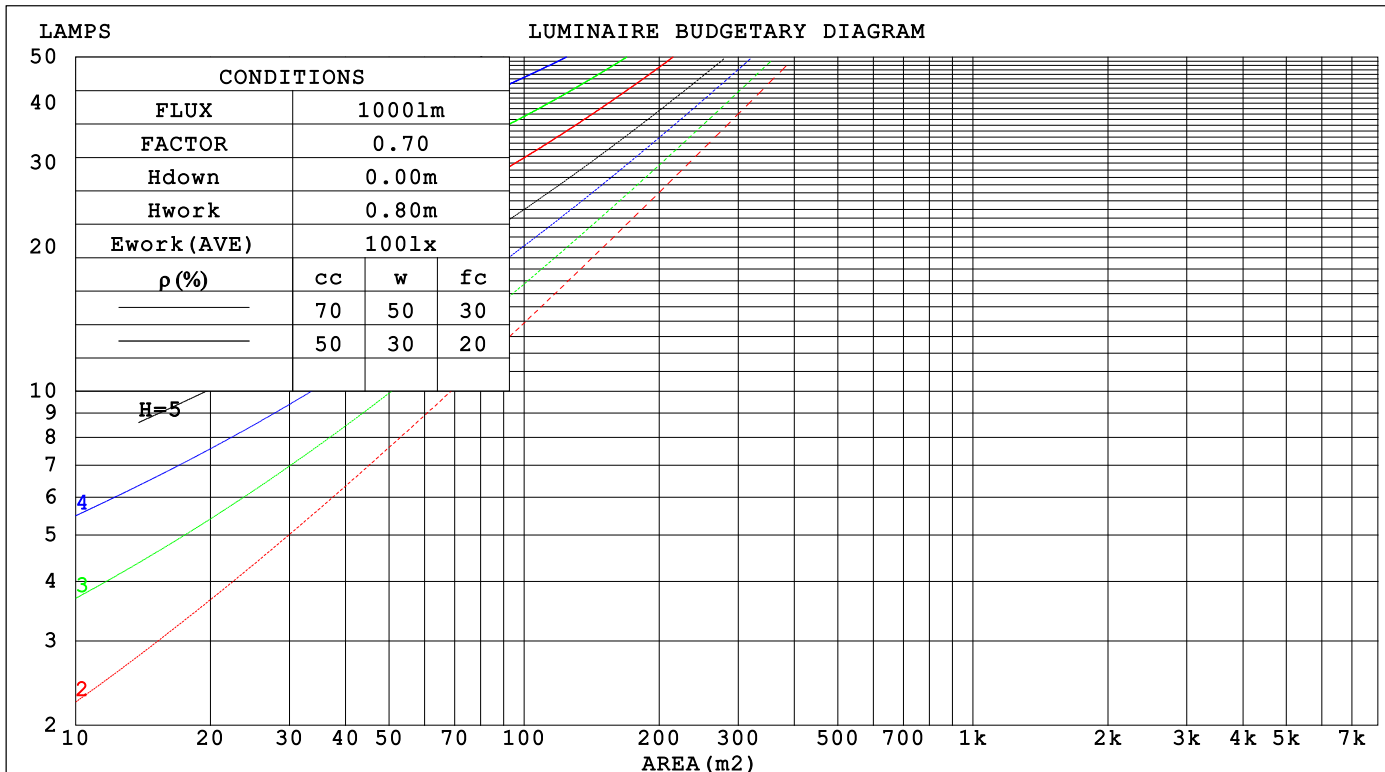

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-08-05

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.82V I:0.0429A P:3.2364W PF:0.3416 Freq:49.99Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:109.373x1 lm		
NAME: WL3363 2700K Ra.90 36D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: VJC Lighting			SUR.: 24			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.321	.182	.058	.313	.179	.057	.300	.172	.055	.287	.165	.053	.275	.159	.051		
2.0	.318	.174	.053	.311	.171	.053	.299	.166	.052	.287	.161	.050	.277	.157	.049		
3.0	.302	.161	.048	.296	.159	.048	.285	.154	.047	.275	.150	.046	.265	.147	.045		
4.0	.283	.147	.043	.277	.145	.043	.267	.142	.042	.258	.138	.042	.249	.135	.041		
5.0	.263	.134	.039	.258	.133	.039	.249	.130	.038	.241	.127	.038	.233	.124	.037		
6.0	.244	.123	.035	.240	.121	.035	.232	.119	.035	.224	.117	.034	.217	.114	.034		
7.0	.227	.112	.032	.224	.111	.032	.216	.109	.031	.209	.107	.031	.203	.105	.031		
8.0	.212	.104	.029	.208	.103	.029	.202	.101	.029	.196	.099	.029	.190	.097	.028		
9.0	.198	.096	.027	.195	.095	.027	.189	.093	.026	.183	.092	.026	.178	.090	.026		
10.0	.185	.089	.025	.182	.088	.025	.177	.087	.024	.172	.085	.024	.167	.084	.024		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021		
1.0	.188	.163	.140	.160	.139	.120	.110	.096	.083	.063	.056	.048	.020	.018	.016		
2.0	.182	.138	.101	.156	.119	.088	.107	.082	.061	.062	.048	.036	.020	.015	.012		
3.0	.177	.121	.076	.152	.104	.066	.104	.073	.046	.060	.042	.027	.019	.014	.009		
4.0	.172	.108	.060	.147	.094	.052	.101	.065	.037	.059	.038	.022	.019	.012	.007		
5.0	.166	.098	.049	.142	.085	.043	.098	.060	.030	.057	.035	.018	.018	.011	.006		
6.0	.159	.091	.041	.137	.078	.036	.094	.055	.025	.055	.032	.015	.018	.011	.005		
7.0	.153	.084	.036	.131	.073	.031	.091	.051	.022	.053	.030	.013	.017	.010	.004		
8.0	.146	.079	.032	.126	.068	.028	.087	.048	.020	.051	.028	.012	.016	.009	.004		
9.0	.140	.074	.029	.121	.064	.025	.084	.045	.018	.049	.027	.011	.016	.009	.004		
10.0	.134	.070	.027	.116	.060	.023	.080	.043	.017	.047	.025	.010	.015	.008	.003		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-08-05

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.82V I:0.0429A P:3.2364W PF:0.3416 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:109.373x1 lm											
NAME: WL3363 2700K Ra.90 36D					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: VJC Lighting					SUR.: 24			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		-7.7	-6.0	-7.4	-5.7	-5.5	-31.2	-29.4	-30.9	-29.2	-29.0
3H		-8.0	-6.4	-7.7	-6.1	-5.8	-31.5	-29.8	-31.1	-29.6	-29.3
4H		-8.1	-6.6	-7.8	-6.3	-6.0	-26.9	-25.4	-26.6	-25.1	-24.8
6H		-8.2	-6.8	-7.9	-6.5	-6.2	-3.0	-1.6	-2.6	-1.3	-1.0
8H		-8.3	-6.9	-7.9	-6.6	-6.3	2.7	4.0	3.0	4.3	4.7
12H		-8.3	-7.0	-8.0	-6.7	-6.4	7.3	8.6	7.7	9.0	9.3
4H 2H		-8.1	-6.6	-7.8	-6.3	-6.0	-31.2	-29.7	-30.8	-29.4	-29.1
3H		-8.3	-7.0	-8.0	-6.7	-6.4	-31.4	-30.1	-31.0	-29.8	-29.4
4H		-8.4	-7.2	-8.0	-6.9	-6.5	-23.7	-22.5	-23.3	-22.2	-21.8
6H		-8.5	-7.5	-8.1	-7.1	-6.7	-2.2	-1.1	-1.8	-0.8	-0.4
8H		-8.6	-7.6	-8.1	-7.2	-6.8	3.7	4.6	4.1	5.0	5.4
12H		-8.6	-7.7	-8.2	-7.3	-6.9	8.6	9.5	9.1	9.9	10.3
8H 4H		-8.6	-7.6	-8.1	-7.2	-6.8	-23.8	-22.9	-23.4	-22.5	-22.1
6H		-8.6	-7.9	-8.2	-7.4	-7.0	-2.1	-1.3	-1.7	-0.9	-0.5
8H		-8.7	-8.0	-8.2	-7.5	-7.1	3.9	4.6	4.4	5.0	5.5
12H		-8.7	-8.1	-8.2	-7.7	-7.2	9.2	9.8	9.7	10.3	10.8
12H 4H		-8.5	-7.6	-8.0	-7.2	-6.8	-23.9	-23.0	-23.4	-22.6	-22.2
6H		-8.6	-7.9	-8.1	-7.4	-7.0	-2.2	-1.5	-1.7	-1.0	-0.6
8H		-8.6	-8.0	-8.1	-7.5	-7.0	3.9	4.5	4.4	4.9	5.4
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 5.7 / - 9.5					+ 0.4 / - 0.3				
1.5H		+ 5.9 / -17.9					+ 0.6 / - 0.6				
2.0H		+ 9.3 / - 1.5					+ 1.1 / - 0.8				

CIE Pub.117, 109.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -7.7)
Area: 0.000452 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-08-05

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.82V I:0.0429A P:3.2364W PF:0.3416 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:109.373x1 lm		
NAME: WL3363 2700K Ra.90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	39	24	15	38	24	15	37	23	15	7
0.80	52	37	28	51	37	28	49	36	27	19
1.00	65	51	42	63	50	42	61	52	41	32
1.25	74	62	53	73	61	52	70	59	52	43
1.50	81	69	61	79	68	60	76	66	59	50
2.00	90	80	73	88	79	72	85	77	71	62
2.50	95	86	79	93	85	78	89	82	76	67
3.00	99	92	85	97	90	84	93	87	82	73
4.00	104	98	92	101	96	91	97	92	88	78
5.00	107	101	96	104	99	95	99	95	92	82
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-08-05

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.82V I:0.0429A P:3.2364W PF:0.3416 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:109.373x1 lm		
NAME: WL3363 2700K Ra.90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

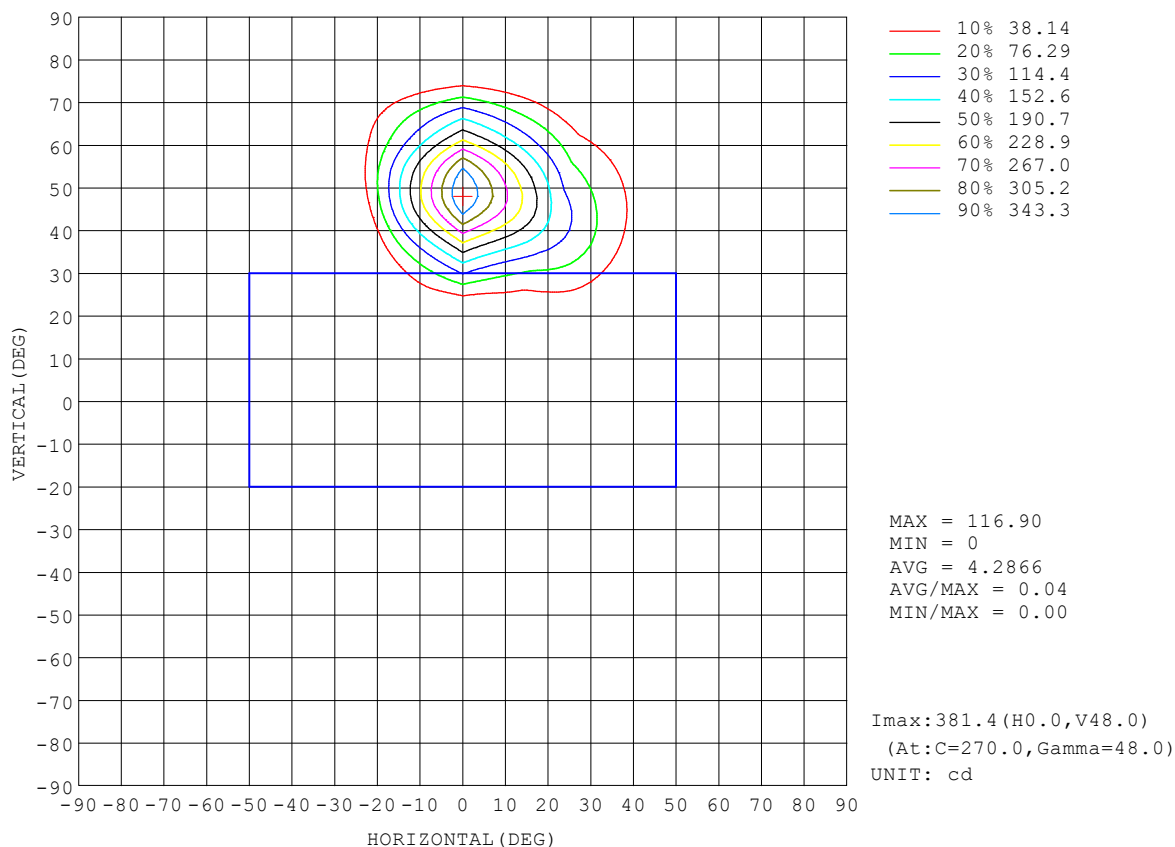


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-08-05

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.82V I:0.0429A P:3.2364W PF:0.3416 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:109.373x1 lm		
NAME: WL3363 2700K Ra.90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

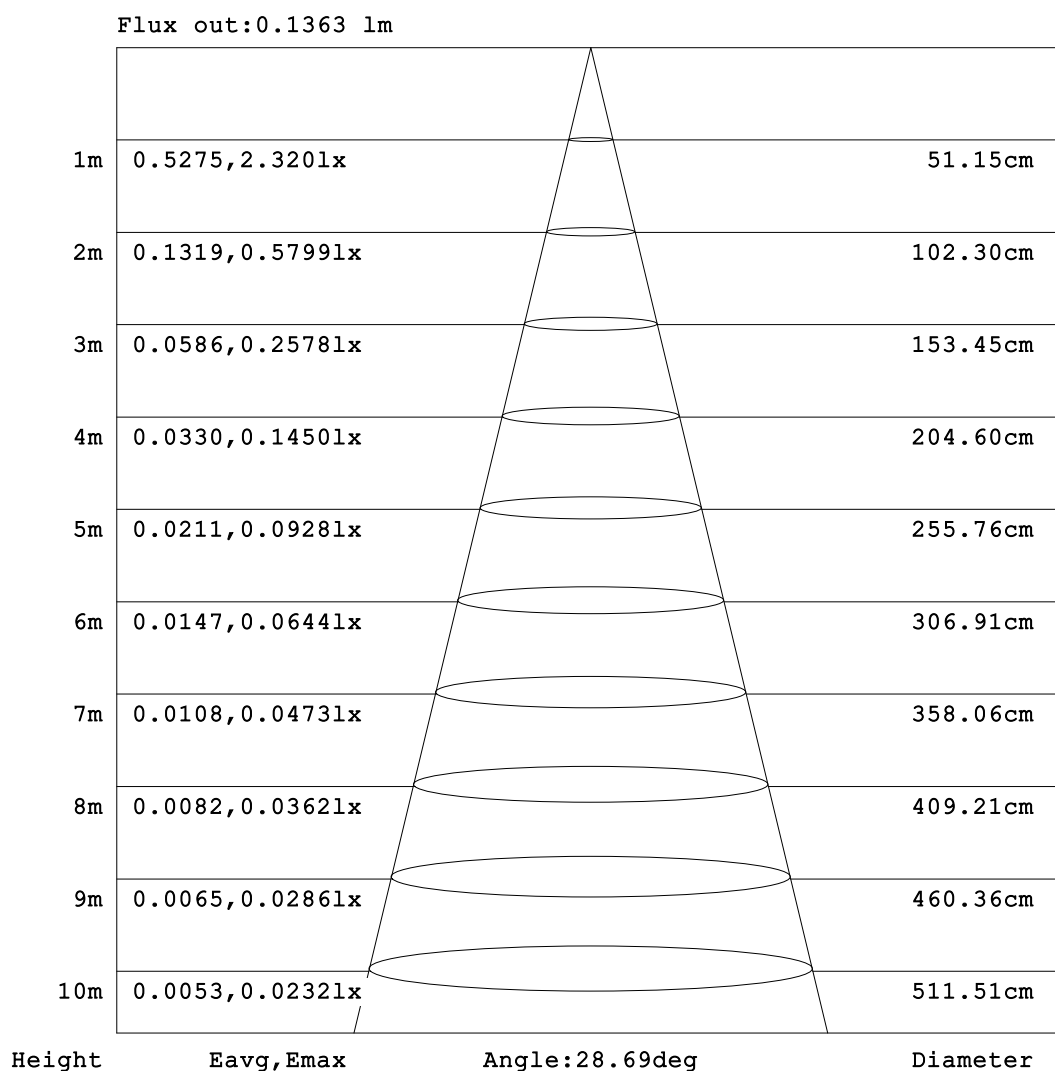


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-08-05

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.82V I:0.0429A P:3.2364W PF:0.3416 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:109.373x1 lm		
NAME: WL3363 2700K Ra.90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

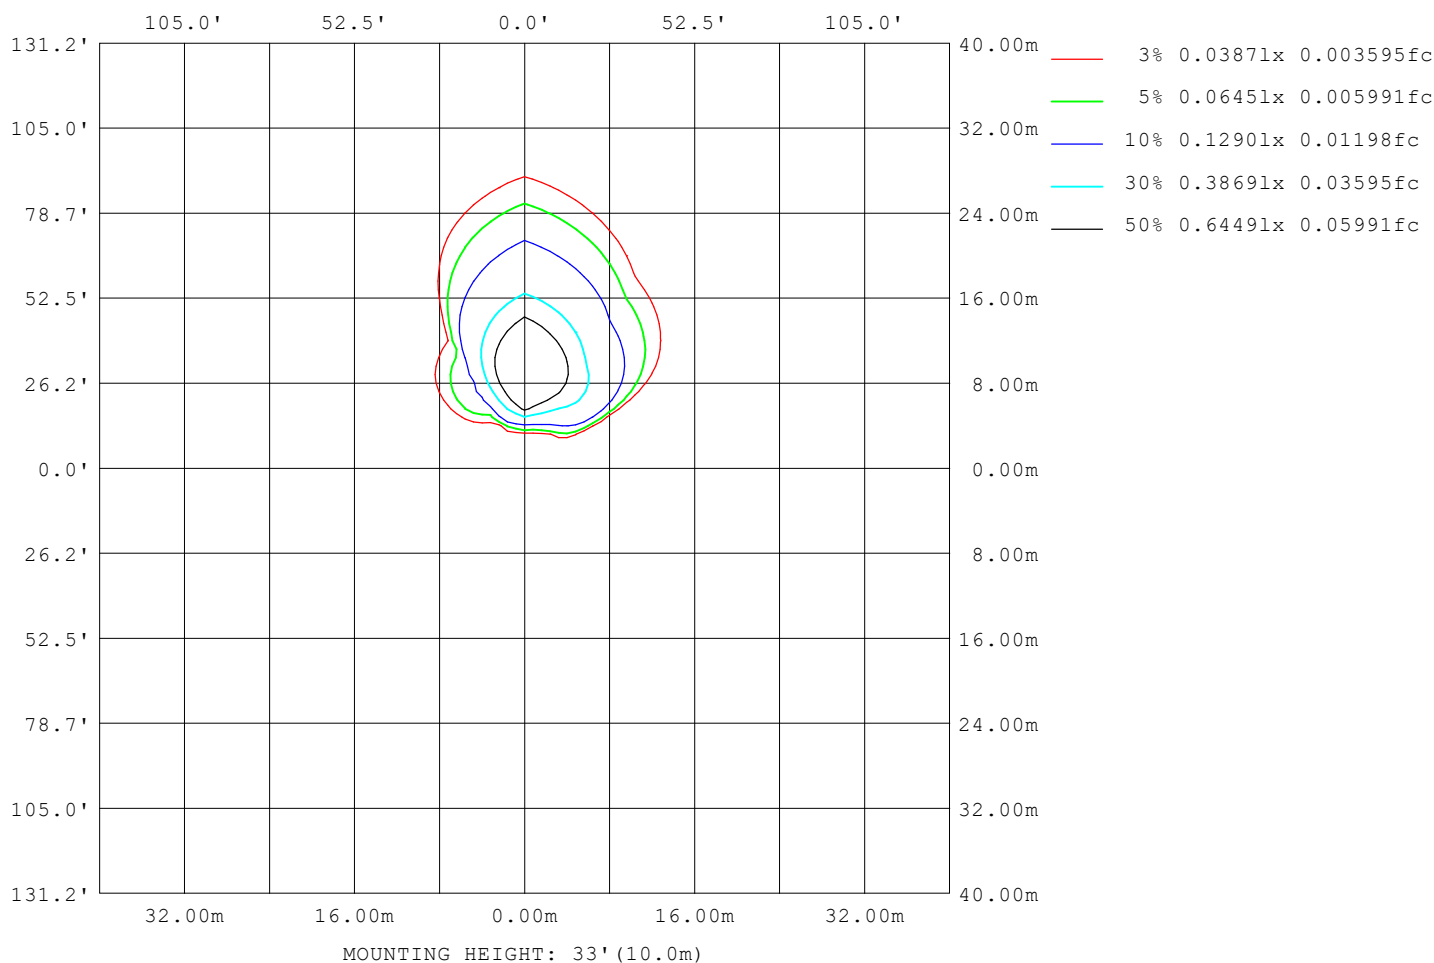

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-08-05

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.82V I:0.0429A P:3.2364W PF:0.3416 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:109.373x1 lm		
NAME: WL3363 2700K Ra.90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5
L_0~180 (75) av	0
L_0~180 (85) av	0
L_90~270 (65) av	514479
L_90~270 (75) av	128626
L_90~270 (85) av	31144
L_45 (65) av	20456
L_45 (75) av	1298
L_45 (85) av	3445

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-08-05

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks:

Planar Illuminance Curve

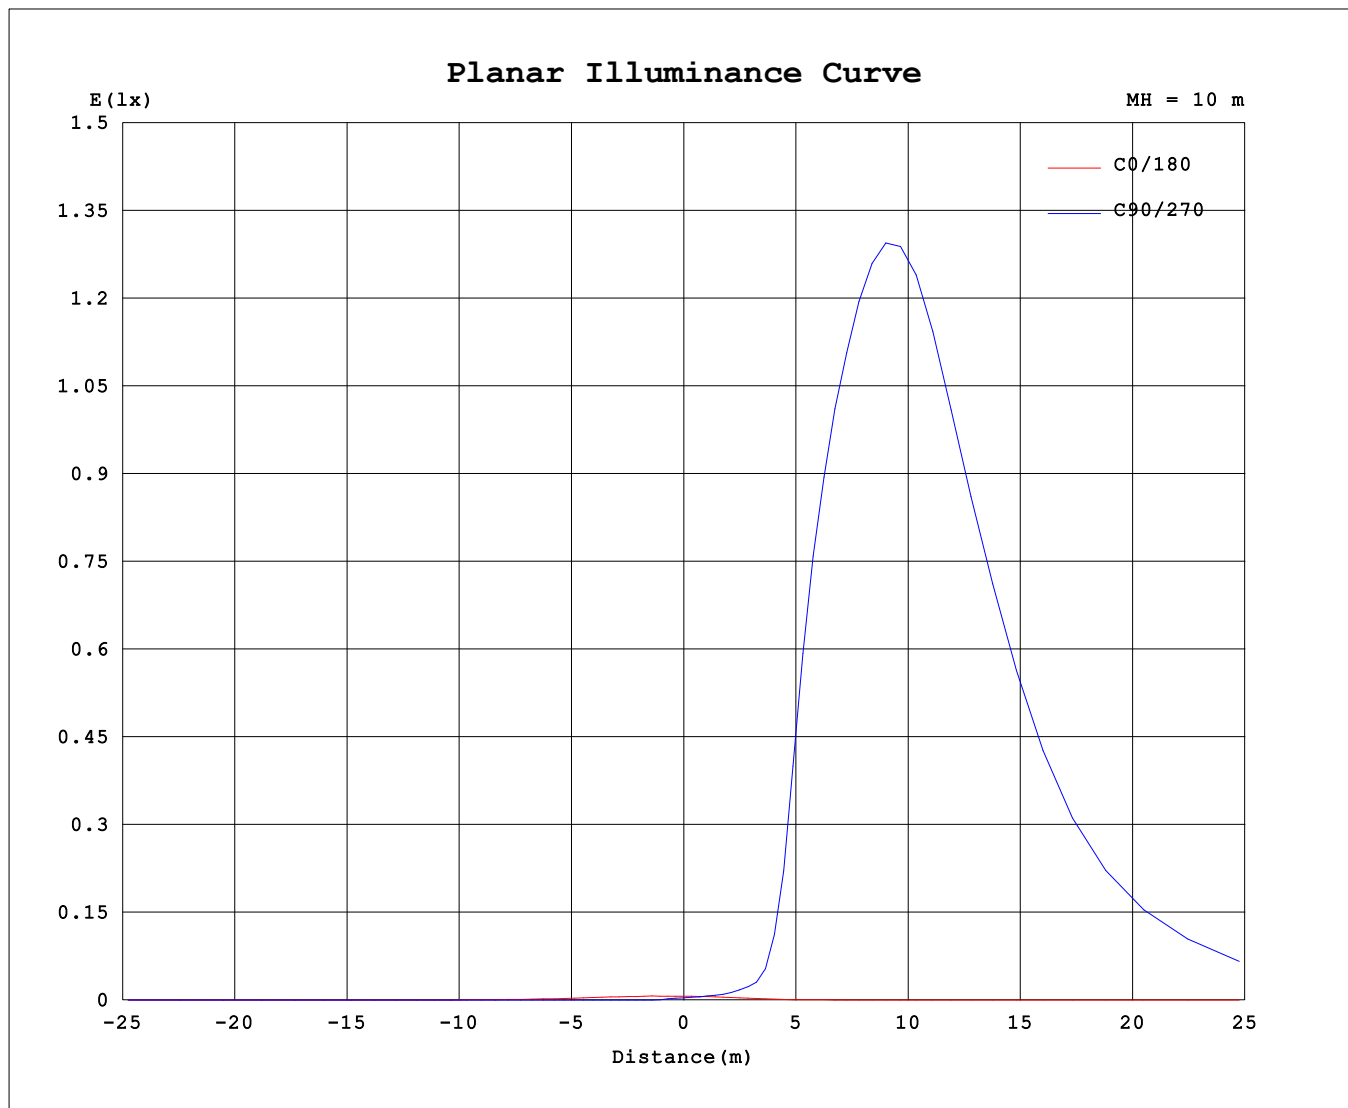

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: 001
 Test Date: 2024-08-05

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 8.370m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.82V I:0.0429A P:3.2364W PF:0.3416 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:109.373x1 lm		
NAME: WL3363 2700K Ra.90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 24	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50						
5	0.51	0.44	0.33	0.28	0.30	0.40	0.46	0.55	0.64	0.68	0.65	0.61						
10	0.53	0.23	0.05	0.00	0.03	0.10	0.40	0.60	0.95	1.26	1.08	0.82						
15	0.52	0.11	0.00	0.00	0.00	0.02	0.33	0.63	1.38	2.24	1.66	0.96						
20	0.47	0.05	0.00	0.00	0.00	0.00	0.20	0.64	2.46	7.53	3.88	1.16						
25	0.43	0.00	0.00	0.00	0.00	0.00	0.13	0.65	3.78	33.6	12.2	1.32						
30	0.30	0.00	0.00	0.00	0.00	0.00	0.08	0.65	10.14	135	44.8	1.52						
35	0.24	0.01	0.00	0.00	0.00	0.00	0.07	0.61	19.0	205	79.2	1.57						
40	0.17	0.01	0.00	0.00	0.01	0.01	0.05	0.54	31.1	324	132	1.56						
45	0.14	0.01	0.00	0.00	0.02	0.02	0.06	0.47	33.9	401	151	1.46						
50	0.07	0.00	0.00	0.00	0.01	0.00	0.04	0.39	31.0	440	144	1.24						
55	0.04	0.00	0.00	0.00	0.00	0.00	0.03	0.34	23.1	406	121	1.15						
60	0.01	0.00	0.00	0.00	0.00	0.00	0.02	0.25	10.09	289	79.6	1.03						
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	5.07	213	53.1	0.90						
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	2.33	111	13.8	0.77						
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	1.40	42.5	4.71	0.54						
80	0.00	0.00	0.00	0.07	0.00	0.00	0.00	0.00	0.68	5.34	1.71	0.20						
85	0.00	0.00	0.00	0.15	0.00	0.00	0.00	0.00	0.44	2.69	1.04	0.12						
90	0.00	0.00	0.03	0.33	0.06	0.00	0.00	0.00	0.25	0.99	0.64	0.00						
95	0.00	0.00	0.08	0.48	0.15	0.00	0.00	0.00	0.07	0.63	0.48	0.00						
100	0.00	0.00	0.18	0.67	0.31	0.00	0.00	0.00	0.00	0.38	0.09	0.00						
105	0.00	0.00	0.26	0.78	0.42	0.00	0.00	0.00	0.00	0.14	0.02	0.00						
110	0.00	0.00	0.37	0.89	0.56	0.02	0.00	0.00	0.00	0.05	0.00	0.00						
115	0.00	0.00	0.45	0.90	0.63	0.05	0.02	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.03	0.50	0.91	0.69	0.11	0.02	0.01	0.00	0.01	0.00	0.00						
125	0.00	0.04	0.52	0.80	0.71	0.15	0.02	0.01	0.00	0.01	0.00	0.00						
130	0.00	0.06	0.53	0.70	0.71	0.22	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.08	0.53	0.62	0.67	0.26	0.01	0.00	0.00	0.00	0.00	0.00						
140	0.02	0.10	0.49	0.47	0.62	0.28	0.01	0.00	0.00	0.00	0.00	0.00						
145	0.04	0.10	0.44	0.42	0.60	0.28	0.02	0.00	0.00	0.00	0.00	0.00						
150	0.04	0.10	0.39	0.43	0.59	0.27	0.04	0.00	0.00	0.00	0.00	0.00						
155	0.04	0.09	0.38	0.52	0.58	0.25	0.04	0.00	0.00	0.00	0.00	0.00						
160	0.04	0.09	0.39	0.59	0.50	0.20	0.05	0.00	0.00	0.00	0.00	0.00						
165	0.04	0.09	0.40	0.56	0.42	0.16	0.05	0.00	0.00	0.00	0.00	0.00						
170	0.06	0.09	0.39	0.40	0.27	0.09	0.05	0.03	0.01	0.00	0.00	0.00						
175	0.06	0.09	0.30	0.27	0.17	0.04	0.05	0.06	0.06	0.00	0.00	0.00						
180	0.05	0.09	0.16	0.12	0.05	0.02	0.05	0.09	0.15	0.10	0.05	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:001
Test Date:2024-08-05

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:8.370m [K=1.0000]
Remarks: