

## DL6043

### 6 Watt Recessed Spotlight

#### Description

Slim trim & adjustable design;  
Low glare reflector;  
Low UGR;  
IP21;

#### Finish

Black/White

#### Material

Aluminium



15D

24D

36D

60D

#### TECHNICAL CHARACTERISTICS

##### Light source


Light source: Citizen CLU7S3-0403 COB  
Output (W): 4.2W (350mA 12V)  
Total power consumption (W): 5W  
Color temperature: 2700K/3000K/4000K  
CRI: 90  
Photobiological risk: RG1  
Real Lumen: 282.41lm  
Qty Leds: 1pcs  
Lm/Real W: 44.49lm/w  
Life Time: 50.000h L80B20  
MacAdam steps: 2  
UGR: <10

##### Gear

This product is supplied without gear;

##### Luminaire

Downlight suitable for indoor area  
crossing: No  
Warranty: 5 Years

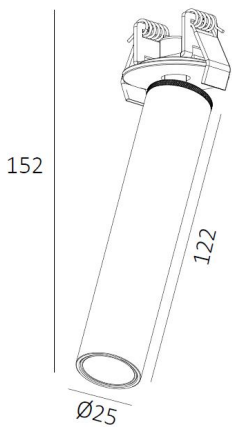

Ø45

35°

33mm  
5-25mm

#### LIGHT DISTRIBUTION for 3000K Narrow 15°

| h(m) | E(lx) | Ø(m)  |
|------|-------|-------|
| 1    | 1969  | Ø0.30 |
| 2    | 492.3 | Ø0.60 |
| 3    | 218.8 | Ø0.90 |
| 4    | 123.1 | Ø1.20 |
| 5    | 78.77 | Ø1.50 |

#### LIGHT DISTRIBUTION for 3000K Medium 36°

| h(m) | E(lx) | Ø(m)  |
|------|-------|-------|
| 1    | 1373  | Ø0.44 |
| 2    | 343.2 | Ø0.89 |
| 3    | 152.5 | Ø1.33 |
| 4    | 85.79 | Ø1.78 |
| 5    | 54.91 | Ø2.23 |

The photograph may not match the reference exactly. Please read the product description to identify the finish.