

DL3001

10W Pinhole Fixed LED downlight

Description

Pinhole trim and trimless design;
Low glare lens;
IP44;

Finish

Black/White

Material

Aluminium



TECHNICAL CHARACTERISTICS

Light source



Light source: Cree CXA1507
Output (W): 9W (250mA 36V)
Total power consumption (W): 10W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 633lm
Qty Leds: 1pc
Lm/Real W: 70
Life Time: 50.000h L80B20
MacAdam steps: 2
UGR: <19

Gear

This product is supplied without gear;

Luminaire

Downlight suitable for indoor area
crossing: No
Warranty: 5 Years




82mm
5-25mm

LIGHT DISTRIBUTION for 3000K

Wide 45.13°

h(m)	E(lx)	Ø(m)
1	1170	Ø0.83
2	292.6	Ø1.66
3	130.0	Ø2.49
4	73.14	Ø3.32
5	46.81	Ø4.15

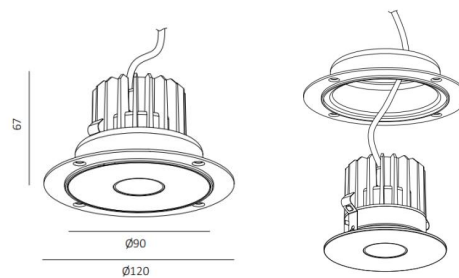

More view



The photograph may not match the reference exactly. Please read the product description to identify the finish.