


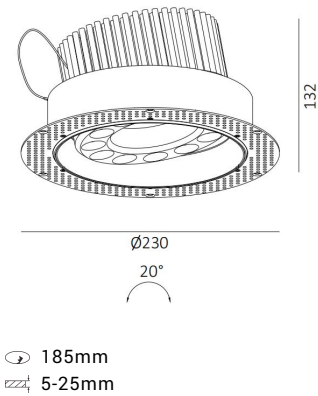

DL6159

50W Trimless Adjustable Downlight

Description

Adjustable & Trimless;
20D tilt;
Easy maintenance;
Low-glare;

Finish

Black/White

Material

Aluminium



15D

24D

36D

60D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux 5050
Output (W): 46.8W (1300mA, 36V)
Total power consumption (W): 50W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 4748lm
Qty Leds: 12
Lm/Real W: 91
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR: <5

Gear

This product is supplied with gear
With BOKE DALI dim driver
BK-DEL060-B2000Ad

Luminaire

Downlight suitable for indoor area
crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K medium 28°

h(m)	E(lx)	Ø(m)
1	18133	Ø0.50
2	4533	Ø1.01
3	2015	Ø1.52
4	1133	Ø2.03
5	725.3	Ø2.54

The photograph may not match the
reference exactly. Please read the
product description to identify the finish.