
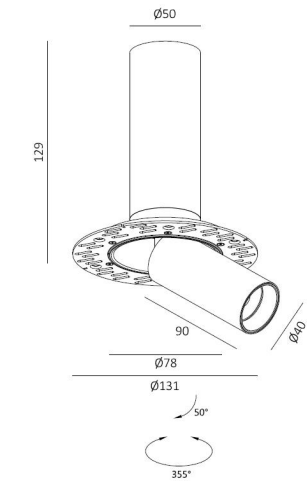




95mm
5-25mm

DL6190

7W Trimless Telescope Downlight

Description

Retractable Spot;
Slim & compact body;
Fix & adjustable 2 in 1;

Finish

Black/White/Anodizing

Material

Aluminium



24D

36D

60D

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux dim to warm
Output (W): 6.4W (180mA 36V)
Total power consumption (W): 7W
Color temperature: Dim-to-warm 1800-3000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 490lm
Qty Leds: 1pc
Lm/Real W: 62.37
Life Time: 50.000h L80B20
MacAdam steps: 3
UGR: <19

Gear

This product is supplied with gear;
With Remote ACTEC Traic Dimmable Led driver
D18009NTF

Luminaire

Downlight suitable for indoor area
crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 1800-3000K Middle 36°

h(m)	E(lx)	Ø(m)
1	1132	Ø0.67
2	283.1	Ø1.35
3	125.8	Ø2.03
4	70.77	Ø2.70
5	45.29	Ø3.38



The photograph may not match the
reference exactly. Please read the
product description to identify the finish.