

PL3133

14W Slim Trim Recessed LED Pendant light

Description

Pendant Light for indoor use.
Low glare design;
Simply design.

Finish

Black/White

Material

Aluminium
Glass



Flood

TECHNICAL CHARACTERISTICS

Light source


Light source: Bridgelux Dim to Warm 1800-3000K
Output (W): 350mA 36V 12.6W
Total power consumption (W): 15W
Color temperature: 2700K/3000K/4000K/1800-3000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 750
Qty Leds: 1
Lm/Real W: 50LM
Life Time: 50.000h L90B10
MacAdam steps: 3
UGR:19

GEAR

This product is supplied with Actec
Traic dimmable driver

Luminaire

IP21 for indoor using
crossing: No
Warranty: 5 Years

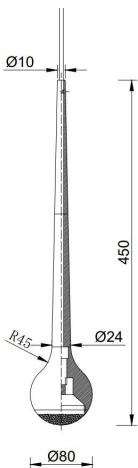

The photograph may not match the
reference exactly. Please read the
product description to identify the finish.