

New Micro Linear Spot 418

-  IP21
-  Class III
-  48V Track
-  Anti glare hazard
UGR<19
-  RG1 | Blue light
-  Altamente riciclabile
Highly recyclable
-  FSC
Package



8.5Watt DC48V In-track Multi Linear Spots

Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
TR3146	10W	350mA 24V	472lm	>90	50.000h L90B10


Finish	LED CCT	Beam	Key Information
101 Textured White	2700K	15°	Material Aluminium
102 Textured Black	3000K	25°	Mounting 48V Track
	4000K	36°	Warranty 5 Year
		50°	

Light Distribution for 3000K

medium 36°

h(m)	E(lx)	o(m)
1	1406	o0.56
2	351.6	o1.13
3	156.3	o1.69
4	87.90	o2.25
5	56.25	o2.82

Sketch

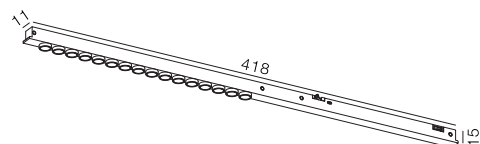

Gear

This product is supplied with 48V on/off, DALI track adaptor.