



DL6322

4.5W Recessed Trim Adjustable Spotlight

Description


Slim trim & adjustable design;
Low glare reflector;
Low UGR;
IP20;

Finish

White/Black/Anodizing Color

Material

Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: Citizen 7S3 2700K 350mA 12V Ra.90
Output (W): 4.2W (350mA, 12V)
Total power consumption (W): 4.5W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 305.95lm
Qty Leds: 1
Lm/Real W: 51.07
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR:14

GEAR

This product is supplied with gear
With Itech triac dim led driver
SE-6-100-450-G1T 350MA9-42V.


Luminaire

Downlight suitable for indoor area
Crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 2700K Medium 50° 4.5W

h(m)	E(lx)	Ø(m)
1	756.0	Ø0.68
2	189.0	Ø1.36
3	84.00	Ø2.04
4	47.25	Ø2.72
5	30.24	Ø3.40

Sketch:

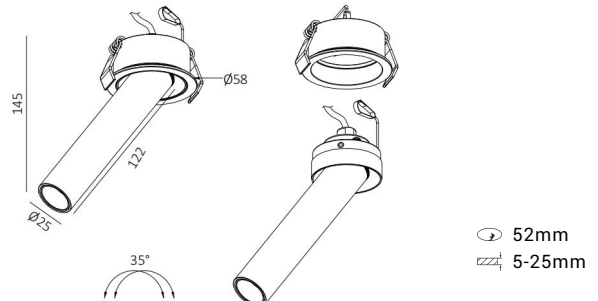

The photograph may not match the reference exactly. Please read the product description to identify the finish.



DL6323

2*4.5W Recessed Trim Adjustable Double Spotlight

Description


Slim trim & adjustable design;
Low glare reflector;
Low UGR;
IP20;

Finish

White/Black/Anodizing Color

Material

Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: Citizen 7S3 2700K 350mA 12V Ra.90
Output (W): 2*4.2W (350mA, 2*12V)
Total power consumption (W): 2*4.5W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 305.95lm
Qty Leds: 2
Lm/Real W: 51.85
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR:8

GEAR

This product is supplied with gear
With Itech triac dim led driver
TD-10-100-450-G1TS 350mA 9-42V


Luminaire

Downlight suitable for indoor area
Crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 2700K Medium 50° 2*4.5W

h(m)	E(lx)	Ø(m)
1	2715	Ø0.43
2	678.8	Ø0.87
3	301.7	Ø1.30
4	169.7	Ø1.74
5	108.6	Ø2.17

Sketch:

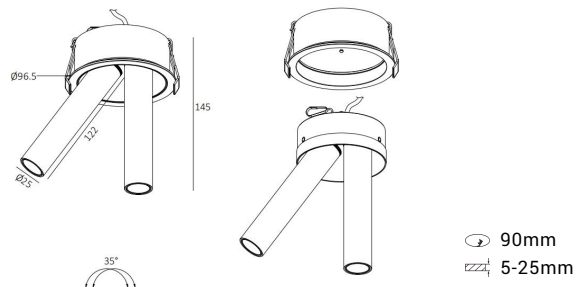

The photograph may not match the reference exactly. Please read the product description to identify the finish.