

SD3361

20W 9Heads 3X3 Surface Mounted Spot

Description


Discreet yet powerful;
blending effortlessly into ceilings;
for minimalist sophistication;
easy to install.

Finish

Black/White

Material

Aluminium

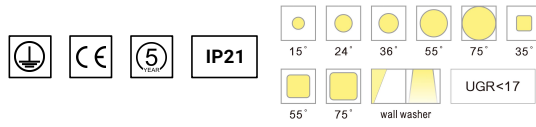

TECHNICAL CHARACTERISTICS

Light source

Light source: Bridgelux 5050
Output (W): 18W(500mA 36V)
Total power consumption (W): 20W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 2100lm
Qty Leds: 9
Lm/Real W: 108lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR<19

Gear

This product is supplied with gear
Built-in On off or Dali as per request.

Luminaire

Crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K Middle 36°

h(m)	E(lx)	Ø(m)
1	4881	Ø0.59
2	1220	Ø1.18
3	542.4	Ø1.77
4	305.1	Ø2.36
5	195.2	Ø2.96

The photograph may not match the reference exactly. Please read the product description to identify the finish.