






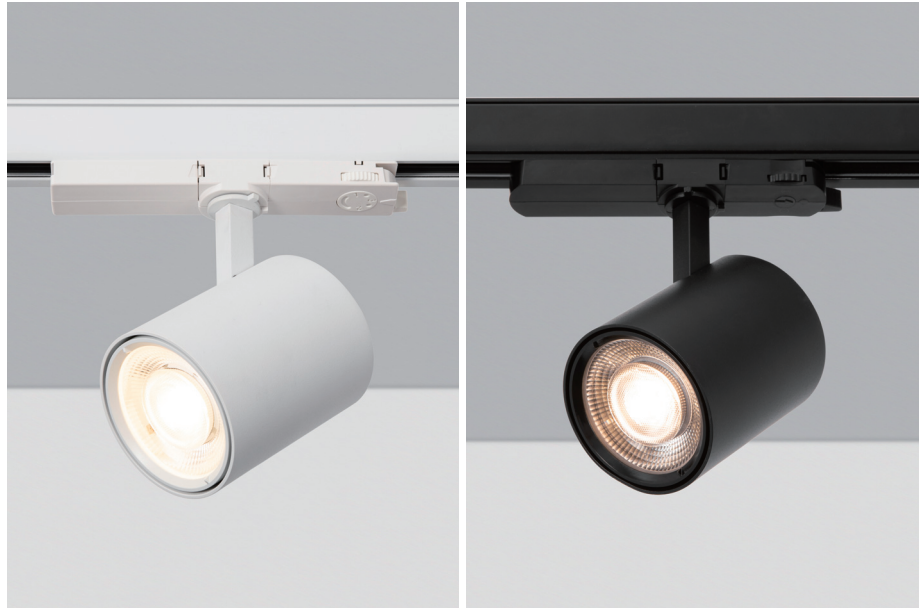


HV Track Sinper 82


-  IP21
-  Class II
-  Track
-  Anti glare hazard UGR<19
-  RG0 | Blue light
-  Altamente riciclabile Highly recyclable
-  FSC Package



28.8Watt Track Spot with Add-on Honeycomb Louvre and Snoot


Code	System Power	LED Power	Lumens(at 3000K)	CRI	Lifetime (Ta 25°C)
TR3051	32.4W	800mA 36V	2700lm	>93/97	50.000h L90B10

Finish	LED CCT	Beam	Key Information	
101 Textured White	2700K	15°	Material	Aluminium
102 Textured Black	3000K	24°	Mounting	3 Phase Track
	4000K	36°	Warranty	5 Year
		50°		






Light Distribution for 3000K

spot 15°			medium 38°			wide 60°		
h(m)	E(lx)	o(m)	h(m)	E(lx)	o(m)	h(m)	E(lx)	o(m)
1	11980	o0.42	1	5783	o0.72	1	2078	o1.42
2	2995	o0.84	2	1446	o1.45	2	519.5	o2.83
3	1331	o1.26	3	642.5	o2.17	3	230.9	o4.25
4	748.7	o1.68	4	361.4	o2.89	4	129.9	o5.67
5	479.2	o2.10	5	231.3	o3.62	5	83.12	o7.09



Accessories

- 3 |  Glass Diffuser
- 3 |  Honeycomb Louvre
- 3 |  Snoot

Gear

This product is supplied with on/off, phase-dim or DALI track adaptor.