
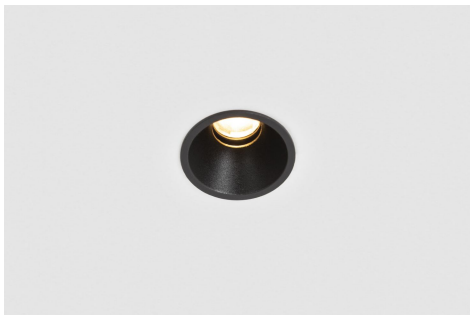



17mm Cutout Ultra compact Mini Downlight

350mA 3V 1W mini Spot
and adaptor ring available in dual color
Osram chip
Max. IP44

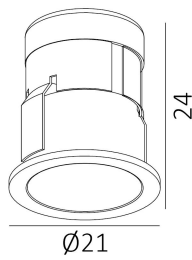

DL3766

17mm Cutout Ultra Compact Mini Downlight

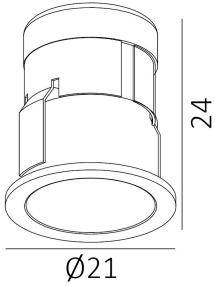


17mm
5-25mm

Description

Adaptor ring available in dual color;
IP44;

Finish
Black/White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: Osram SSL150
Output (W): 350mA 3V
Total power consumption (W): 1W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 80lm
Qty Leds: 1
Lm/Real W: 44.78lm
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: 14

GEAR

This product is supplied without gear.

Luminaire

Crossing: No
Warranty: 5 Years

PHOTOMETRIC DATA

LIGHT DISTRIBUTION for 3000K
Narrow 20°

h(m)	E(lx)	Ø(m)
1	263.0	Ø0.36
2	65.76	Ø0.72
3	29.23	Ø1.08
4	16.44	Ø1.44
5	10.52	Ø1.80

The photograph may not match the reference exactly. Please read the product description to identify the finish.