

Product Description: 2*10W Trimless Double Square Downlight
Model: DL3115



Technical Data

Light source	Citizen CLU028
System wattage	20W (250mA, 36V, 2pcs)
Lumen flux	1000lm (20W, 36D, 3000K, Ra.90)
Colour temperature	2700K, 3000K, 4000K
Colour rendering index	Ra≥90
Chromaticity rate	3 MacAdam
Beam angle	15D, 24D, 36D, Lens Type
Service lifetime	50,000hrs, L70
Ingress protection	IP21 Installed
Operation voltage	220-240Vac, 50/60Hz
Operation temperature	-20~40D
Protection class	III
Finishing	White RAL9016, Gloss 5 Black RAL9005, Gloss 5
Construction	Aluminum
Mounting	Ceiling Recessed, trimless type
Warranty	5 years
Lighting control	Tridonic non-dim, ECG standard Actec triac dim 0-10V, Dali diming upon request

Ordering Data

DL3115					
Model	Finish	Power	CCT	CRI	Beam
	• AW • AB	• 20	• 27 • 30 • 40	• R80 • R90	• 15D • 24D • 36D


Features

- Slim body design
- Trimless design
- Interchangeable honeycomb bezel

Accessories

- Honeycomb

Diagram

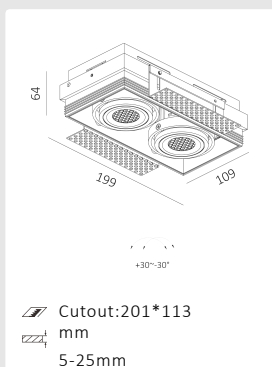

LIGHT DISTRIBUTION for 3000K medium 36°

h(m)	E(lx)	Ø(m)
1	290.6	Ø0.63
2	72.6	Ø1.28
3	32.2	Ø1.93
4	18.1	Ø2.57
5	11.6	Ø3.22

Photometric 3000K 36D Ra.90