

Product Description: 3*10W Triple Square Downlight
Model: DL3350



Technical Data

Light source	Citizen CLU028
System wattage	30W (250mA, 36V, 3pcs)
Lumen flux	300lm (30W, 36D, 3000K, Ra.90)
Colour temperature	2700K, 3000K, 4000K
Colour rendering index	Ra≥90
Chromaticity rate	3 MacAdam
Beam angle	24D, 36D, 60D, Lens Type
Service lifetime	50,000hrs, L70
Ingress protection	IP21 Installed
Operation voltage	220-240Vac, 50/60Hz
Operation temperature	-20~40D
Protection class	III
Finishing	White RAL9016, Gloss 5 Black RAL9005, Gloss 5
Baffle	White, black, chrome, dark chrome
Construction	Aluminum
Mounting	Ceiling Recessed, spring type
Warranty	5 years
Lighting control	Tridonic non-dim, ECG standard Actec triac dim 0-10V, Dali diming upon request

Ordering Data

DL3350					
Model	Finish	Power	CCT	CRI	Beam
	• AW • AB	• 30	• 27 • 30 • 40	• R80 • R90	• 24D • 36D • 60D


Features

- Slim body design

Accessories

- N/A

Diagram

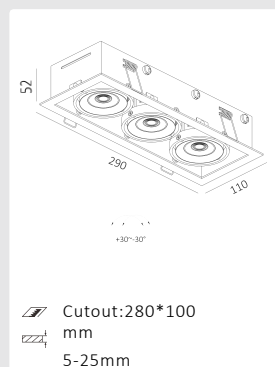

LIGHT DISTRIBUTION for 3000K medium 36°

h(m)	E(lx)	Ø(m)
1	435.8	Ø0.64
2	108.9	Ø1.29
3	48.4	Ø1.93
4	27.2	Ø2.58
5	17.4	Ø3.22

Photometric 3000K 36D Ra.90